
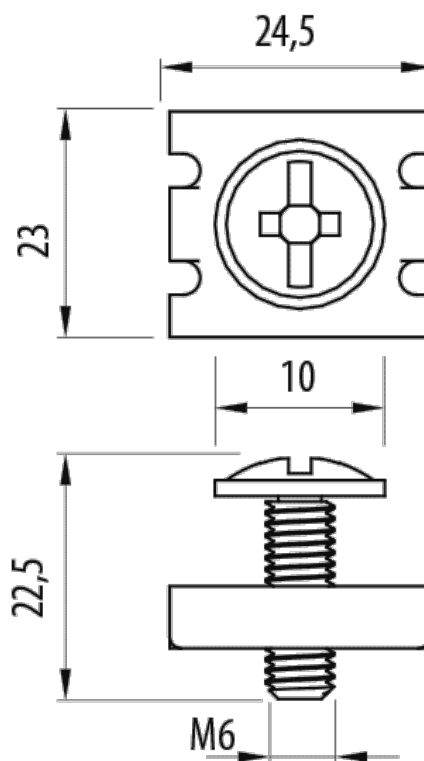


Part Clamp 60x60-2 (Ref: 64060058)

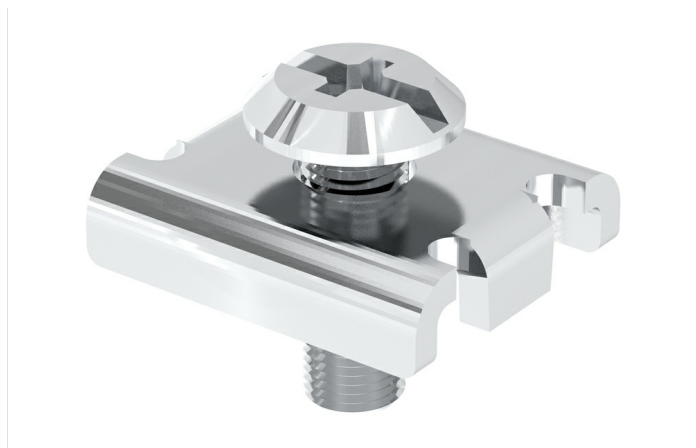

Description

M6x18 fixing kit for connecting the Rejiband® 60x60 mm grid tray with double wire on the base. With INOX protection system, I316L finish. Formed by two pieces of a Phillips head bolt and plate that fits over the rods. Manufactured in Steel and available in various Protection Systems.

Advantages

Wide range of protection systems: EZ, BC, GC, BK8 and stainless steel AISI 304 and AISI 316L.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

The screw is separate to the plate allowing direct manipulation with a tool and easy installation.

Easy connection on 41x21 mm and 41x41 mm channels by using an additional M6 channel nut.

The shape of the plate fits precisely on the double rod at the base of the tray. Maximum resistance.

Applications

Suitable for the connection of Rejiband® trays of 60x60 mm with double rod in the base directly on to a base or facing or directly to 41x21 mm or 41x41 mm channel for the routing, transport and distribution of cables in electrical installations and / or telecommunications in civil works, tunnels, car parks, public buildings, shopping centers, data processing centers, large infrastructures, airports, subway lines, trains, tertiary sector and industrial applications.

Solutions



FOOD INDUSTRY



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data

ETIM 10	EC001005	kg/u	0,014
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		u	25
Protection System	INOX	Material	Acero inoxidable AISI 316L
Finish	Stainless Steel AISI 316L	Working temperature range (°C)	-50 / 150 °C
Resistance Class	Class 9D	Fire resistance	A1 No combustible
M/PG	M 6		
G (mm)	18		

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

Product applications

