


Nemaband hold down brackets

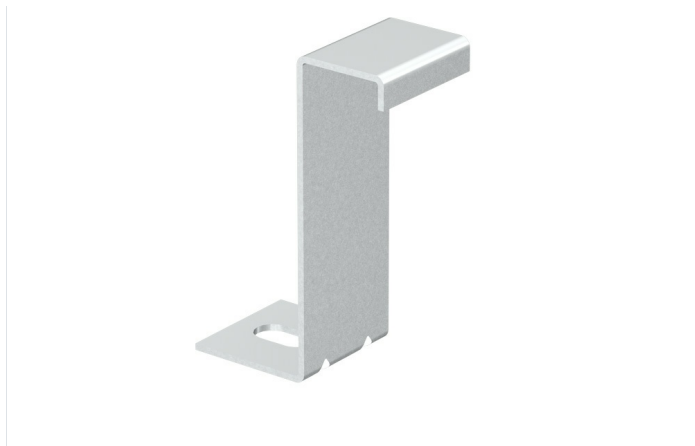

Description

Metal fixing for connecting the Nemaband® ladder to supports with M8 bolts and nuts. Secure the ladder using its entire height. Suitable for all ladder widths. Made from steel with GC Protection system.

Advantages

It covers the entire height of the cable tray, improving the attachment of the cable tray to the support and increasing load capacity.

Large saving in time and cost of the installation.

Connect with M8 Megaband Kit or M8 bolts and nuts.

CE certified in compliance with the low voltage directive 2014/35 / EU

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

Applications

Suitable for fixing Nemaband® ladder to supports for routing, protecting and distributing cables in electrical installations in industrial applications and large spans in: Oil & Gas and Petrochemical Industry, Power Plants, Electric Power Plants, etc. Water Treatment, Mining and Cement Offshore Platforms, Ports, Maritime Applications. Industrial projects in aggressive environments.

Solutions



Main technical characteristics						
 GC	 Class 7	 100, 150	 Steel with surface coating	 -50 / 150 °C	 A1 No combustible	ETIM 10 EC001005

Product data			
	Ref	kg/u	
100	82002747	0,114	4
150	82002748	0,148	18

 Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

 Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic