
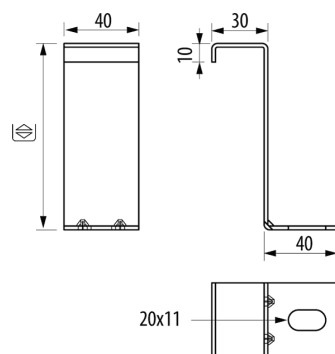


**Nemaband hold down brackets** ( Ref: 82002747 )

1/2

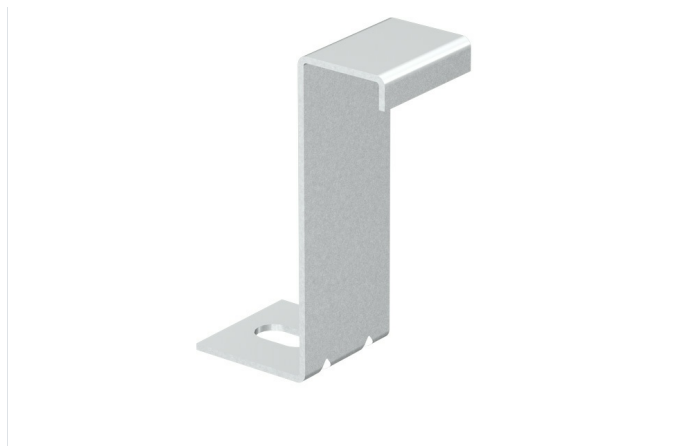

### Description

Metal fixing for connecting the Nemaband® ladder to supports with M8 bolts and nuts. Secure the ladder using its entire height. Of 100 mm height. Suitable for all ladder widths. Made from steel with GC Protection system.

### Advantages

It covers the entire height of the cable tray, improving the attachment of the cable tray to the support and increasing load capacity.

CE certified in compliance with the low voltage directive 2014/35 / EU

Connect with M8 Megaband Kit or M8 bolts and nuts.

Large saving in time and cost of the installation.

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

### Applications

Suitable for fixing Nemaband® ladder to supports for routing, protecting and distributing cables in electrical installations in industrial applications and large spans in: Oil & Gas and Petrochemical Industry, Power Plants, Electric Power Plants, etc. Water Treatment, Mining and Cement Offshore Platforms, Ports, Maritime Applications. Industrial projects in aggressive environments.

### Solutions



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data

|                                       |                         |                                |                            |
|---------------------------------------|-------------------------|--------------------------------|----------------------------|
| ETIM 10                               | EC001005                | u                              | 4                          |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) | 0,295                   | Material                       | Steel with surface coating |
| Protection System                     | GC                      | Working temperature range (°C) | -50 / 150 °C               |
| Finish                                | HDG, Hot Dip Galvanised | Fire resistance                | A1 No combustible          |
| Resistance Class                      | Class 7                 |                                |                            |
| Flange (mm)                           | 100                     |                                |                            |
| kg/u                                  | 0,114                   |                                |                            |

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic