
Nemaband hold down brackets (Ref: 82002747)



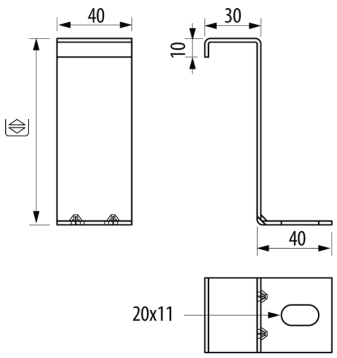

Description

Metal fixing for connecting the Nemaband® ladder to supports with M8 bolts and nuts. Secure the ladder using its entire height. Of 100 mm height. Suitable for all ladder widths. Made from steel with GC Protection system.

Advantages

It covers the entire height of the cable tray, improving the attachment of the cable tray to the support and increasing load capacity.

CE certified in compliance with the low voltage directive 2014/35 / EU

Connect with M8 Megaband Kit or M8 bolts and nuts.

Large saving in time and cost of the installation.

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

Applications

Suitable for fixing Nemaband® ladder to supports for routing, protecting and distributing cables in electrical installations in industrial applications and large spans in: Oil & Gas and Petrochemical Industry, Power Plants, Electric Power Plants, etc. Water Treatment, Mining and Cement Offshore Platforms, Ports, Maritime Applications. Industrial projects in aggressive environments.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Nemaband hold down brackets (Ref: 82002747)

Product data

ETIM 10	EC001005	**u**	4
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	0,295	**Material**	Steel with surface coating
Protection System	GC	**Working temperature range (°C)**	-50 / 150 ºC
Finish	HDG, Hot Dip Galvanised	**Fire resistance**	A1 No combustible
Resistance Class	Class 7		
Flange (mm)	100		
kg/u	0,114		

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."