

Megaband Marine Joints

17/11/2026

Megaband Marine Hold Down Clamp (Ref: 82003129)



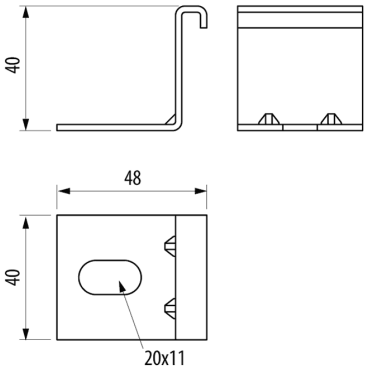

Description

Metal coupler for connecting Megaband® Marine ladder in heights 60, 85, 100 and 120mm and widths from 100 to 1,000mm. Available in various protection systems. With INOX protection system, I316L finish

Advantages

Suitable for the support of wire mesh trays and other items with loads not exceeding 50 kg.

CE certified in compliance with the low voltage directive 2014/35 / EU

Improves the seal of the fitting or cable gland on the box, reaching IP67.

For assembly you need only two pieces per support.

SAFECu Protection system, copper-plated treatment, which confers hygienic properties by eliminating bacteria, viruses and fungi

Applications

Suitable for installation in small spaces. Routing, Protection and Distribution of cables in electrical installations in the Naval Industry, Ships, Offshore Platforms, Ports and Maritime applications.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Megaband Marine Hold Down Clamp (Ref: 82003129)

Product data

ETIM 10	EC001005	**u**	10
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		**Material**	Acero inoxidable AISI 316L
Protection System	INOX	**Working temperature range (°C)**	-50 / 150 ºC
Finish	Stainless Steel AISI 316L	**Fire resistance**	A1 No combustible
Resistance Class	Class 9D		
kg/u	0,053		

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."