


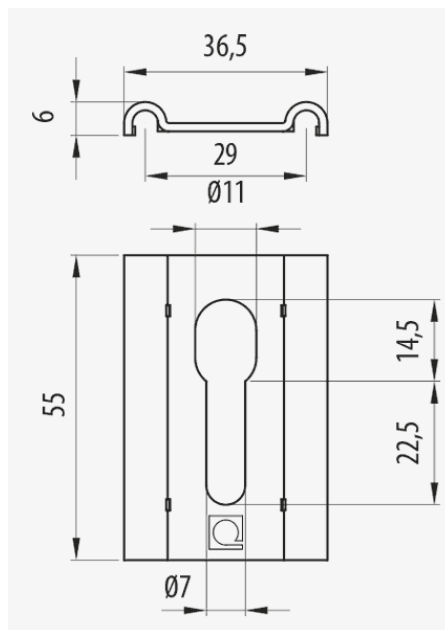

Description

Metal fastening for the ceiling or wall mounting of Rejitech® and Rejitech® G+ metal tray. With EZ protection system. Manufactured in different Protection Systems.

Advantages

Use one fixing every 1 metre of tray.

Available in two protection systems, EZ and BC, depending on the type of application.

Suitable for ceiling and wall instalations.

Fixing in only three steps.

Quick installation without joints or screws.

Applications

Used for ceiling or wall installations with the Rejitech® and Rejitech G+ wire mesh tray for managing and supporting wiring in reduced space or false ceilings.

Solutions



Product data			
ETIM 10		EC001003	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Protection System		EZ	
Finish		EZ3, Electrogalvanised	
Resistance Class		Class 3	
kg/u		0,026	
u		25	
Material		Steel with surface coating	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Product applications



