


## Cover fixing PQU

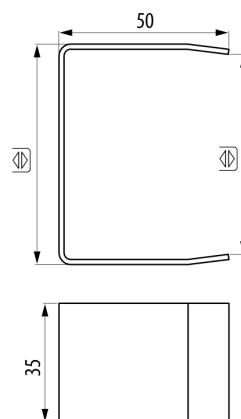

### Description

Lid fixing for use on the Pemsaband® PQU tray. It provides more security to the system during wind or inclement weather. Made from AISI 304 stainless steel.

### Advantages

Allows greater protection of wiring in aggressive environments.

Fixing element to give a greater closure to the Pemsaband PQU AL cable tray

CEPSA product approval. Designed according to ESP-2208-5 specification.

CE certified in compliance with the low voltage directive 2014/35 / EU

Made of Aluminum alloy 1050H24. Excellent corrosion resistance and mechanical properties.

### Applications

### Solutions



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Main technical characteristics							ETIM
INOX	Class 9C	30, 60, 50	4	Stainless steel AISI 304	-50 / 150 °C	A1 No combustible	

Product data		
	Ref	kg/u
30	82002291	0.055
60	82002292	0.067
50	82002293	0.063

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

## Cover fixing PQU

3/3

### Product applications

