


# Flat Ring ( Ref: 39092029 )

1/2

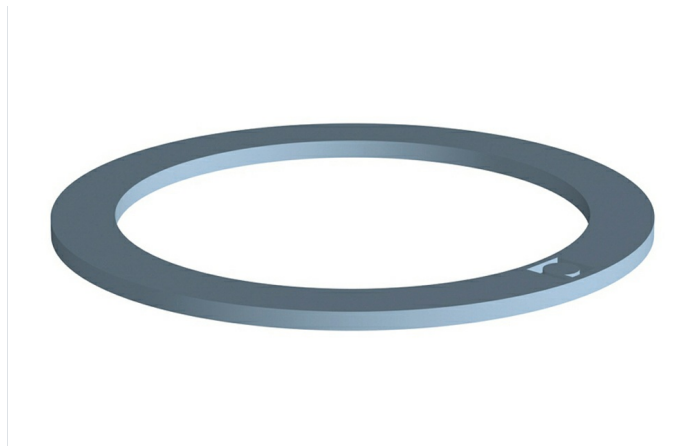

## Description

Flat ring of NBR elastomer in blue colour, metric and PG thread for use with external threaded fittings and cable glands to provide an IP67 protection index to the joint. Available in various sizes.

## Advantages

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Available in blue.

Available in metric thread: M12, M16, M20, M25, M32, M40 M50 and M63 and PG thread: 7, 9, 11, 13.5, 16, 21, 29, 36 and 48.

Manufactured in NBR elastomer.

Improves the seal of the fitting or cable gland on the box, reaching IP67.

## Applications

Suitable for use on an external thread to improve the tightness of the joint with the boxes. Can be used for any range of fittings, conduits or cable glands.

## Solutions



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

| Product data                          |  |                 |  |
|---------------------------------------|--|-----------------|--|
| ETIM 10                               |  | EC001181        |  |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) |  |                 |  |
| Colour                                |  | Blue RAL 5024   |  |
| M/PG                                  |  | PG29            |  |
| kg/u                                  |  | 0,001           |  |
| u                                     |  | 30              |  |
| Material                              |  | NBR             |  |
| IP                                    |  | IP67            |  |
| Working temperature range (°C)        |  | -25 / 105 °C    |  |
| Fire resistance                       |  | Flame retardant |  |

| Protection System                 |
|-----------------------------------|
| CU - Copper electroplated         |
| PG - Pregalvanised                |
| EZ - Electrogalvanised            |
| BC - Electrogalvanised Bichromate |
| BK8 - High Resistance Coating     |
| GC - Hot Dip Galvanising          |
| INOX - Stainless Steel            |
| PT - Polyester Paint              |
| AL - Aluminum                     |
| LN - Brass or Nickel-plated brass |

| Insulating materials                      |
|-------------------------------------------|
| PC+ABS - Halogen Free Polycarbonate + ABS |
| PVC - Polyvinyl Chloride                  |
| PP - Halogen Free Polypropylene           |
| PA6 - Halogen Free Polyamide 6            |
| PA12 - Halogen Free Polyamide 12          |
| PU - Polyurethane                         |
| PE - Polyethylene                         |
| NBR - NBR rubber                          |
| PET - Thermoplastic Polyester             |
| TPV - Thermoplastic                       |