


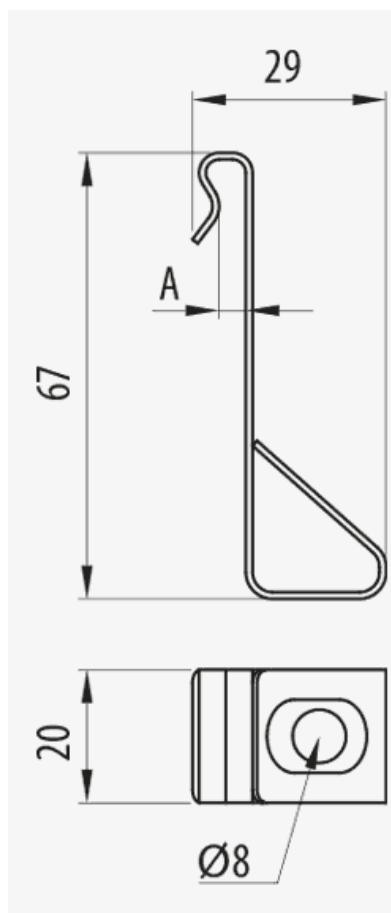

Description

Metal suspension clamp for vertical connection when installing Rejiband® wire mesh and Pemsaband® sheet trays onto a beam using M6 or M8 threaded rod. Cables of 4-10 mm² of section. Admissible working load of 65 Kg. Assembly by means of the quick-connect click system without screws. Made of steel with EZ Protection System.

Advantages

EZ protection system. Suitable for indoor installations and dry environments.

CE conformity to directive 2014/35 / EU.

Connection with M6 or M8 threaded rod using hexagonal nuts.

Available in pre-galvanised and hot dip galvanised finishes.

Applications

Suitable for indoor installation on beams with threaded rod for trays in the electrical wiring and telecommunications in public buildings, infrastructure, civil works and tertiary sector.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Vertical Angel Hanger (Ref: 68000732)

2/4

Product data

ETIM 10	EC000464	kg/u	0,041
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		u	100
Protection System	EZ	Material	Steel with surface coating
Finish	PAV, Passivated	SWL (kg)	65
Resistance Class	Class 3	Working temperature range (°C)	-50 / 150 °C
Cable diameter range	4 / 10	Fire resistance	A1 No combustible
A (mm)	4		
B (mm)	10		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product applications

