

Assembly Accessories

Metal Cable Clamp

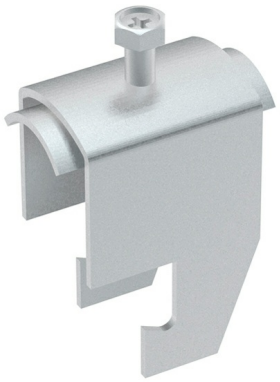

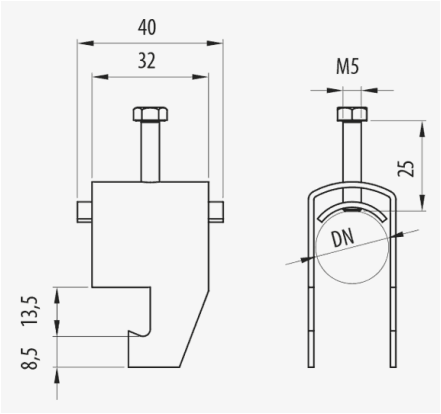

Description

GC Protection System steel clamp in various sizes, suitable for fixing cables to the rungs of the Megaband® ladder. Assembly by click system of quick connection without screws. Available for different cable diameters.

Advantages

Especially suitable for vertical installations.

Thanks to its shape, and the curved metal plate, it prevents any damage to the cables.

Electrical continuity guaranteed according to standard IEC61537.

Applications

Used to secure the cables to the rungs of Megaband® ladder, in the management of cables in electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial installations, tertiary sector. Used especially in vertical installations.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Metal Cable Clamp

Main technical characteristics

GC | Class 6 | DN NW10, NW15, NW20, NW25, NW32, NW40, NW45, NW50, NW60, NW70, NW80, NW90 | 1

Steel with surface coating | -50 / 150 °C | A1 No combustible | ETIM 10 EC000454

Product data

DN	REF	kg/u
NW10	93930110	0,036
NW15	93930115	0,042
NW20	93930120	0,054
NW25	93930125	0,063
NW32	93930132	0,074
NW40	93930140	0,086
NW45	93930145	0,095
NW50	93930150	0,137
NW60	93930160	0,158
NW70	93930170	0,179
NW80	93930180	0,208
NW90	93930190	0,235

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."


Metal Cable Clamp

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Metal Cable Clamp

Product applications

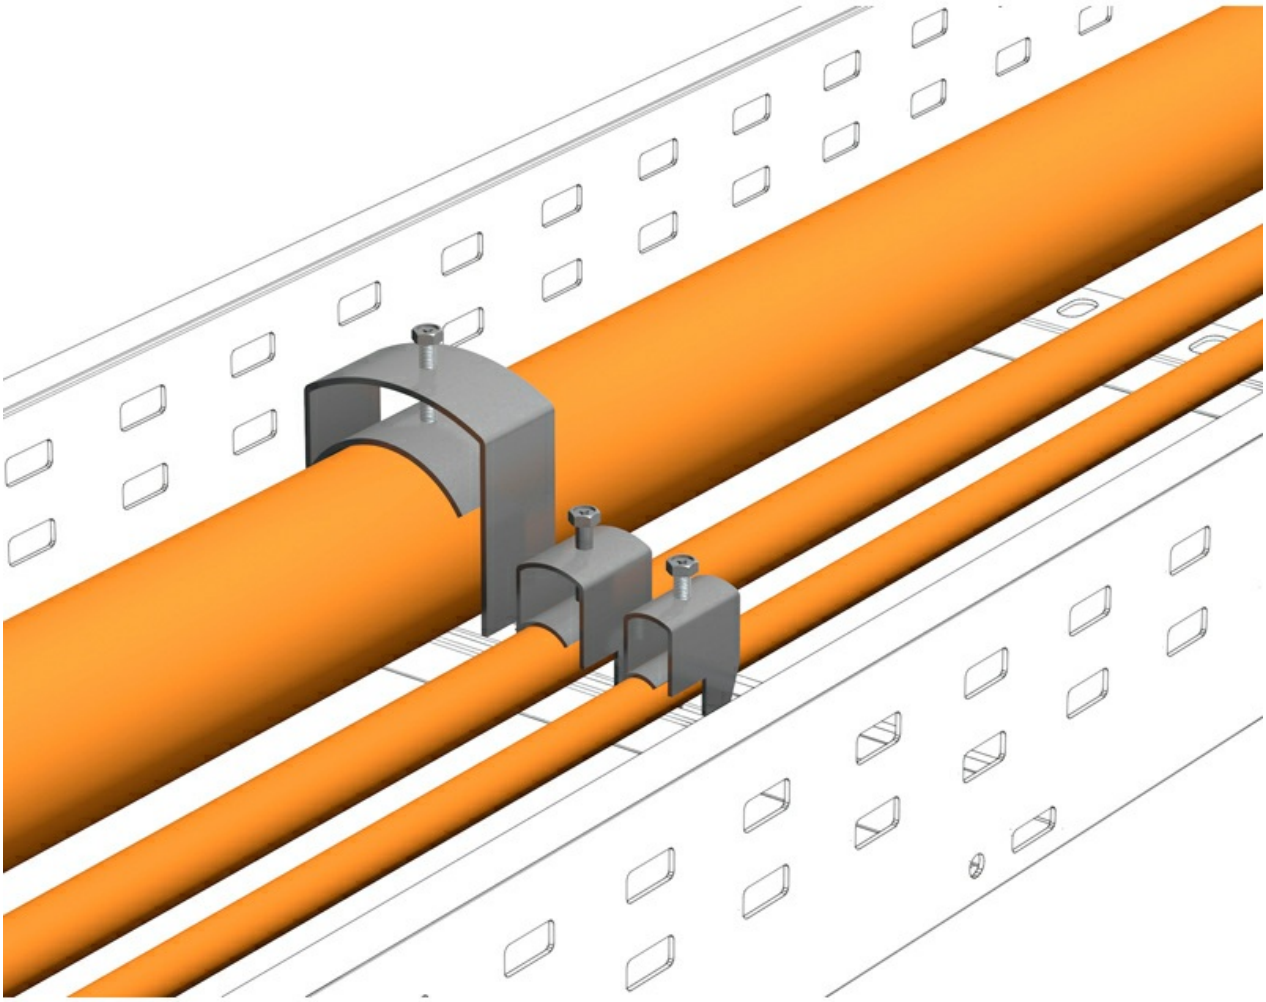

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."