
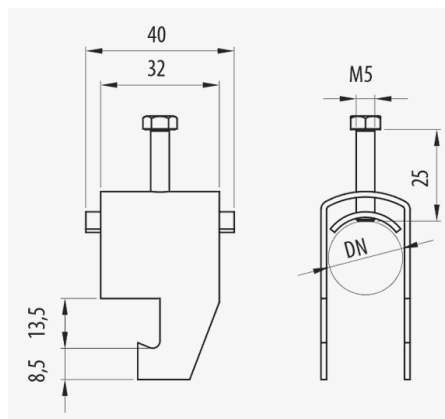


Metal Cable Clamp (Ref: 93930110)

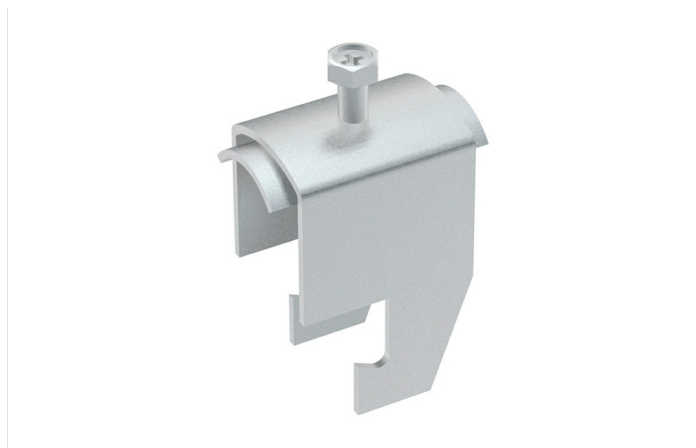

Description

GC Protection System steel clamp in various sizes, suitable for fixing cables to the rungs of the Megaband® ladder. Maximum diameter DN10 mm. Assembly by click system of quick connection without screws. Available for different cable diameters.

Advantages

Especially suitable for vertical installations.

Electrical continuity guaranteed according to standard IEC61537.

Thanks to its shape, and the curved metal plate, it prevents any damage to the cables.

Applications

Used to secure the cables to the rungs of Megaband® ladder, in the management of cables in electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial installations, tertiary sector. Used especially in vertical installations.

Solutions



Product data			
ETIM 10	EC000454	u	1
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	0,093	Material	Steel with surface coating
Protection System	GC	Working temperature range (°C)	-50 / 150 °C
Finish	HDG, Hot Dip Galvanised	Fire resistance	A1 No combustible
Resistance Class	Class 6		
DN	NW10		
kg/u	0,036		

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Metal Cable Clamp (Ref: 93930110)

Product applications

