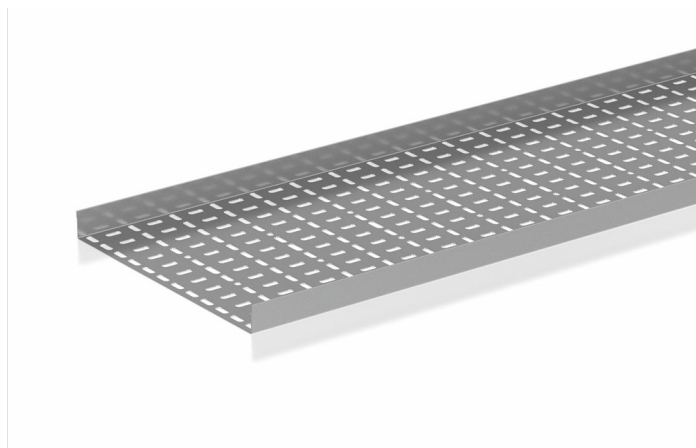


### Description

Perforated Cable tray of 10, 15 and 30 mm height. Of 15 mm height, Width 200 mm, With PG protection system, PG3 finish. The Pemsaband® naval tray is suitable for supporting and routing electrical cables of medium loads. There are a wide variety of sizes to choose from according to the needs of each installation.

### Advantages

Profiled safety edge for cable protection. It also prevents possible cuts when handled by the installer.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

The perforations in the longitudinal direction assist in the fixing and clamping of the cables.

### Applications

Support, management and distribution of cables in Electrical and/or telecommunications installations in: Civil Works, Tunnels, Car Parks, Public Buildings, Shopping Centres, Data Processing Centres, Infrastructures, Airports, Underground and Railway. Tertiary sector and industrial applications: Naval, Petrochemical, Textile, Chemical and Food. Indoor applications in the dry or in exterior atmospheres with wet environments according to the various protection systems.

### Solutions



MARINE INDUSTRY



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data

|                                       |                    |                                |                            |
|---------------------------------------|--------------------|--------------------------------|----------------------------|
| ETIM 10                               | EC000047           | u                              | 8                          |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) | 3,589              | Material                       | Steel with surface coating |
| Protection System                     | PG                 | Impact Strength (J)            | 20 J                       |
| Finish                                | PG3, Pregalvanised | Thickness (mm)                 | 0.7                        |
| Resistance Class                      | Class 3            | IP                             | IP23                       |
| Flange (mm)                           | 15                 | Working temperature range (°C) | -50 / 150 °C               |
| Width (mm)                            | 200                | Fire resistance                | A1 No combustible          |
| Length (m)                            | 2                  |                                |                            |
| kg/u                                  | 1,111              |                                |                            |

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic