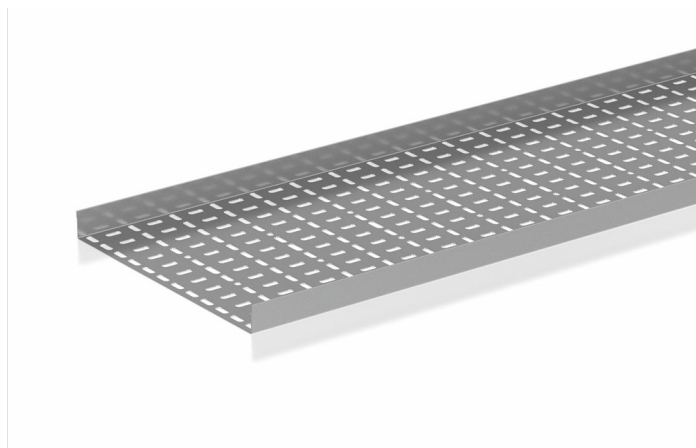


Description

Perforated Cable tray of 10, 15 and 30 mm height. Of 15 mm height, Width 100 mm, With INOX protection system, I304 finish. The Pemsaband® naval tray is suitable for supporting and routing electrical cables of medium loads. There are a wide variety of sizes to choose from according to the needs of each installation.

Advantages

Profiled safety edge for cable protection. It also prevents possible cuts when handled by the installer.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

The perforations in the longitudinal direction assist in the fixing and clamping of the cables.

Applications

Support, management and distribution of cables in Electrical and/or telecommunications installations in: Civil Works, Tunnels, Car Parks, Public Buildings, Shopping Centres, Data Processing Centres, Infrastructures, Airports, Underground and Railway. Tertiary sector and industrial applications: Naval, Petrochemical, Textile, Chemical and Food. Indoor applications in the dry or in exterior atmospheres with wet environments according to the various protection systems.

Solutions



MARINE INDUSTRY



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



ETIM 10	EC000047
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	3,56
Protection System	INOX
Finish	Stainless Steel AISI 304
Resistance Class	Class 9C
Flange (mm)	15
Width (mm)	100
Length (m)	2
kg/u	0,670

u	16
Material	Stainless steel AISI 304
Impact Strength (J)	20 J
Thickness (mm)	0.7
IP	IP23
Working temperature range (°C)	-50 / 150 °C
Fire resistance	A1 No combustible

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsas®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsas®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsas, Reijband, Pemsaband, Inducanal, Reijtech, Megaband, Pemsaflex are registered trademarks property of "Pemsas Cable Management, S.A."