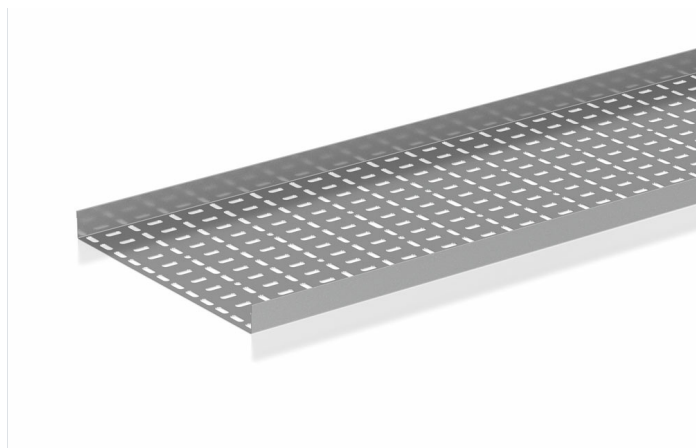


Description

Perforated Cable tray of 10, 15 and 30 mm height. Of 30 mm height, Width 300 mm, With INOX protection system, I304 finish. The Pemsaband® naval tray is suitable for supporting and routing electrical cables of medium loads. There are a wide variety of sizes to choose from according to the needs of each installation.

Advantages

Profiled safety edge for cable protection. It also prevents possible cuts when handled by the installer.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

The perforations in the longitudinal direction assist in the fixing and clamping of the cables.

Applications

Support, management and distribution of cables in Electrical and/or telecommunications installations in: Civil Works, Tunnels, Car Parks, Public Buildings, Shopping Centres, Data Processing Centres, Infrastructures, Airports, Underground and Railway. Tertiary sector and industrial applications: Naval, Petrochemical, Textile, Chemical and Food. Indoor applications in the dry or in exterior atmospheres with wet environments according to the various protection systems.

Solutions



MARINE INDUSTRY



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data			
ETIM 10		EC000047	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		10,418	
Protection System		INOX	
Finish		Stainless Steel AISI 304	
Resistance Class		Class 9C	
Flange (mm)		30	
Width (mm)		300	
Length (m)		2	
kg/u		1,962	
u		4	
Material		Stainless steel AISI 304	
Impact Strength (J)		20 J	
Thickness (mm)		0.8	
IP		IP23	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

- 🔒 Protection System
- CU

- Copper electroplated
- PG

- Pregalvanised
- EZ

- Electrogalvanised
- BC

- Electrogalvanised Bichromate
- BK8

- High Resistance Coating
- GC

- Hot Dip Galvanising
- INOX

- Stainless Steel
- PT

- Polyester Paint
- AL

- Aluminum
- LN

- Brass or Nickel-plated brass

- 🏠 Insulating materials
- PC+ABS

- Halogen Free Polycarbonate + ABS
- PVC

- Polyvinyl Chloride
- PP

- Halogen Free Polypropylene
- PA6

- Halogen Free Polyamide 6
- PA12

- Halogen Free Polyamide 12
- PU

- Polyurethane
- PE

- Polyethylene
- NBR

- NBR rubber
- PET

- Thermoplastic Polyester
- TPV

- Thermoplastic