
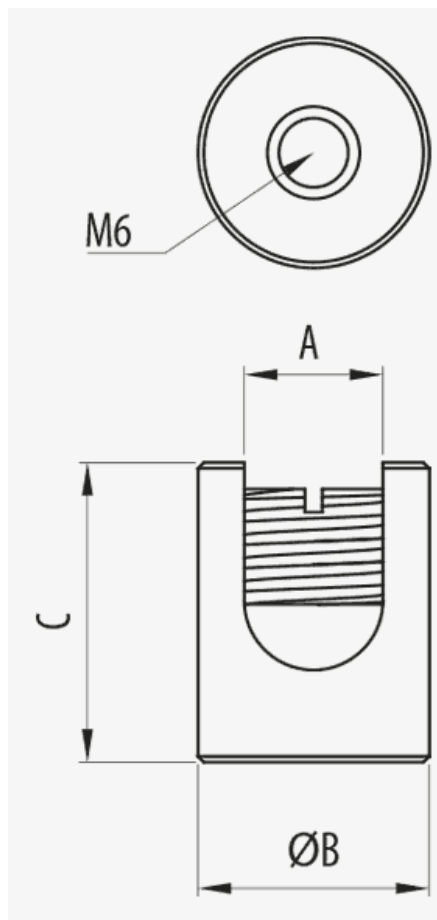


## Bonding Connector

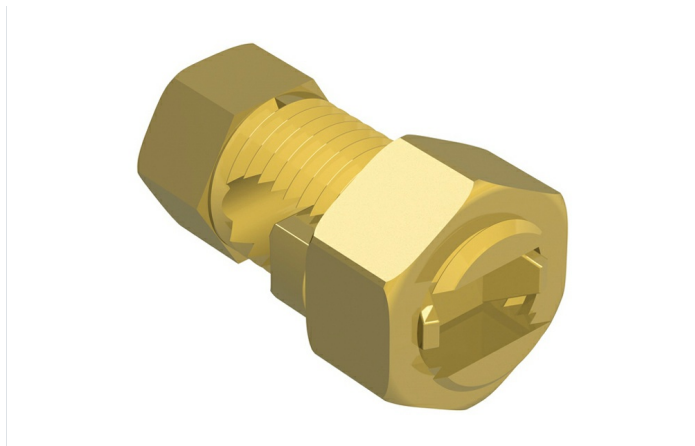

### Description

### Advantages

### Applications

### Solutions



Main technical characteristics

|                                                                                     |                                                                                      |                                                                                         |                                                                                                |                     |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|---------------------|
|  LTN |  20 |  Brass |  -50 / 150 °C | ETIM 10<br>EC002935 |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|---------------------|

Product data

|  |  |  |  |  |  |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 16                                                                                | 4.5 / 8                                                                           | 16                                                                                | 50                                                                                | 68000034                                                                            | 0,024                                                                               |
| 50                                                                                | 8 / 11.5                                                                          | 50                                                                                | 110                                                                               | 68000035                                                                            | 0,043                                                                               |

 Protection System


- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

 Insulating materials


- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

## Bonding Connector


### Product applications

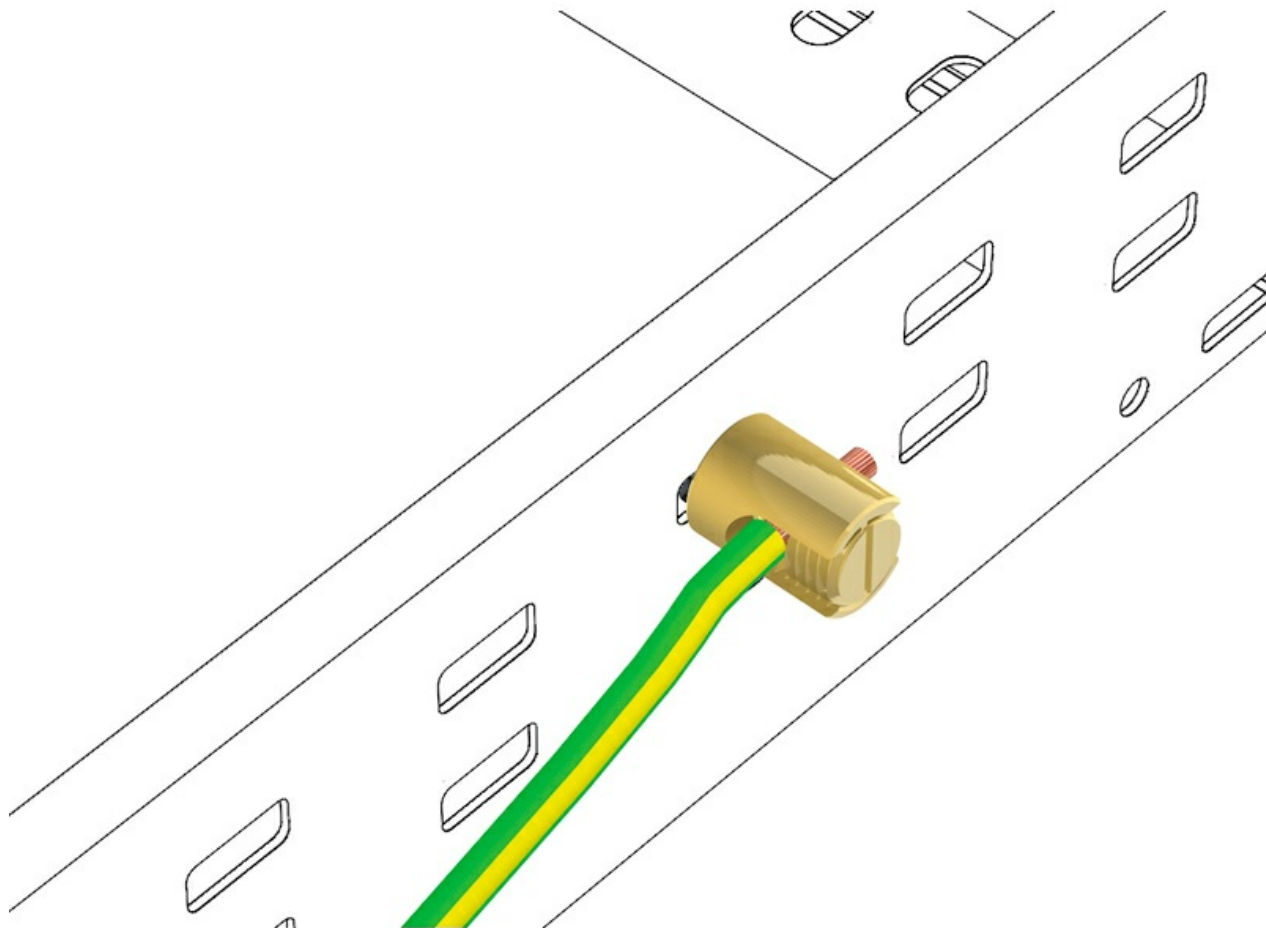

# Bonding Connector

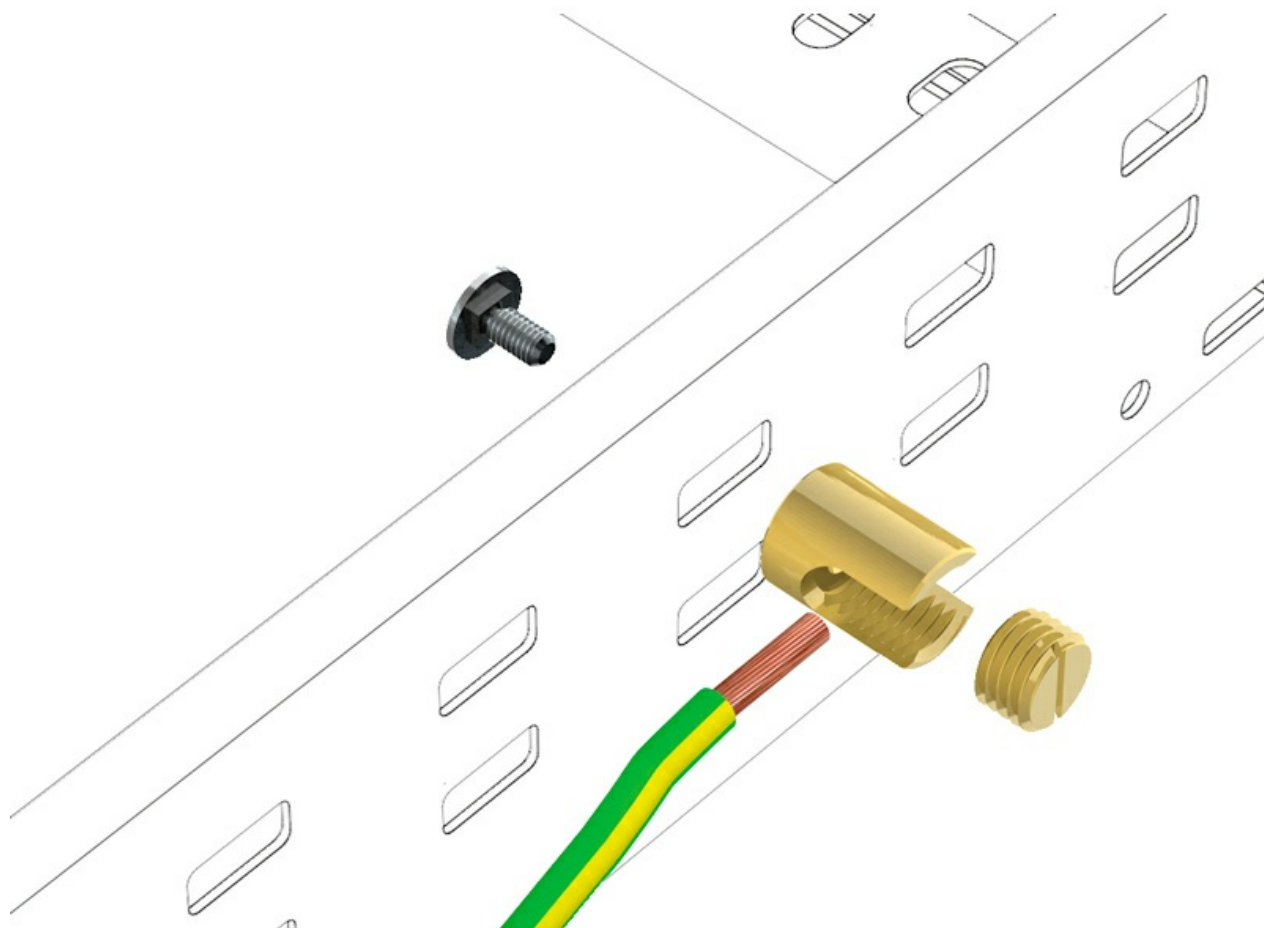

# Bonding Connector

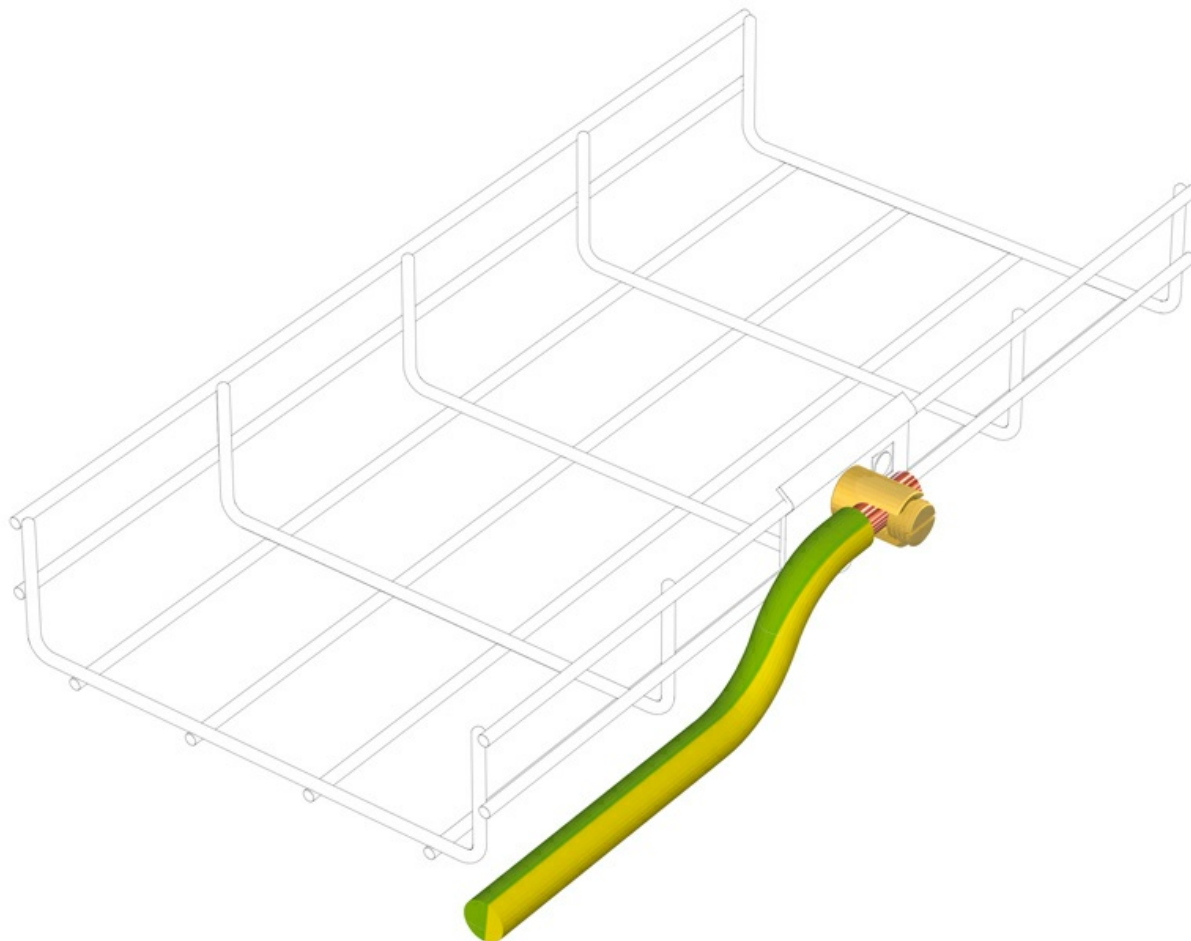

# Bonding Connector

