


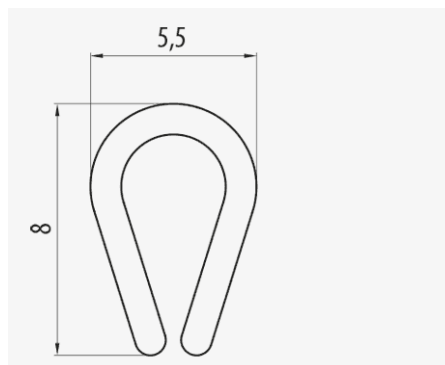

Description

Grey plastic protection profile for the ends and cuts of the Pemsaband® and Inducanal® tray.

Advantages

Available in grey.

Made of plastic.

Maximum edge protection.

Very fast assembly on the tray.

No screws or other fasteners required.

Applications

Suitable to protect the edges of the Pemsaband® One perforated and solid sheet trays in electrical or telecommunication cabling installations.

Solutions



Product data			
ETIM 10		EC002935	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
kg/u		0,033	
u		25	
		Material	Plastic
		Working temperature range (°C)	-15 / 90 °C

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic



Product applications

