


Fibre Washer II

1/2

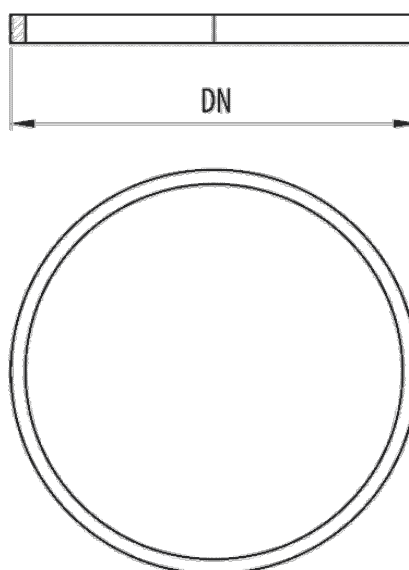

Description

Type II fibre washer in black nitrile RAL 9005 with an IP65 degree of protection available in NW70 and NW95 diameters for mounting on the connection of the fitting to the conduit in the Macroflex® range.

Advantages

Mounting inside fittings of the Macroflex® range.

Protection index EN 60529: IP65.

Working temperature: -25°C to + 105°C.

Manufactured in NBR elastomer.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Applications

Suitable for fixing large diameter Pemsaflex® and Macroflex® conduits for the protection of wiring and conductors in electrical installations of machines, tools, industrial equipment, robots, vehicles and special installations.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Fibre Washer II

Main technical characteristics

Colour	Black RAL 9005	DN	NW70, NW95, NW17	M	NBR	IP	IP65	°C	-25 / 90	Flame retardant	ETIM 10 EC001181
--------	----------------	----	------------------	---	-----	----	------	----	----------	-----------------	------------------

Product data

DN	Ref	kg/u	u
NW70	33090170	0,001	10
NW95	33090195	0,001	10
NW17	81000463	0,000	30

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

