


**Fibre Washer II** ( Ref: 81000463 )

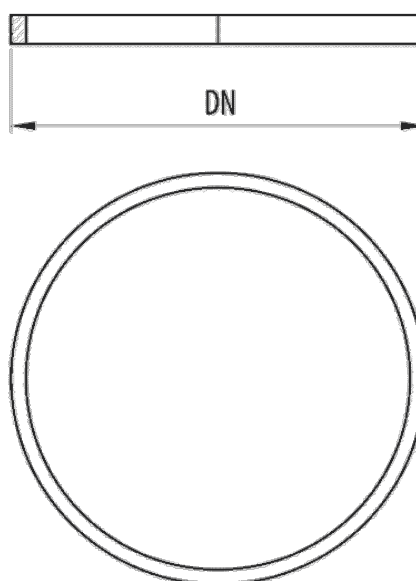

### Description

Type II fibre washer in black nitrile RAL 9005 with an IP65 degree of protection available in NW70 and NW95 diameters for mounting on the connection of the fitting to the conduit in the Macroflex® range.

### Advantages

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Manufactured in NBR elastomer.

Protection index EN 60529: IP65.

Mounting inside fittings of the Macroflex® range.

Working temperature: -25°C to + 105°C.

### Applications

Suitable for fixing large diameter Pemsaflex® and Macroflex® conduits for the protection of wiring and conductors in electrical installations of machines, tools, industrial equipment, robots, vehicles and special installations.

### Solutions



## Product data

|                                              |                |                                       |                 |
|----------------------------------------------|----------------|---------------------------------------|-----------------|
| <b>ETIM 10</b>                               | EC001181       | <b>Material</b>                       | NBR             |
| <b>Huella de CO2. GWP A1-A3 (kg CO2 eq.)</b> |                | <b>IP</b>                             | IP65            |
| <b>Colour</b>                                | Black RAL 9005 | <b>Working temperature range (°C)</b> | -25 / 90 °C     |
| <b>DN</b>                                    | NW17           | <b>Fire resistance</b>                | Flame retardant |
| <b>kg/u</b>                                  | 0,000          |                                       |                 |
| <b>u</b>                                     | 30             |                                       |                 |

## Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

