

# Megaband CPS Straight Joint Kit (KUR) (

Ref: 82002346 )

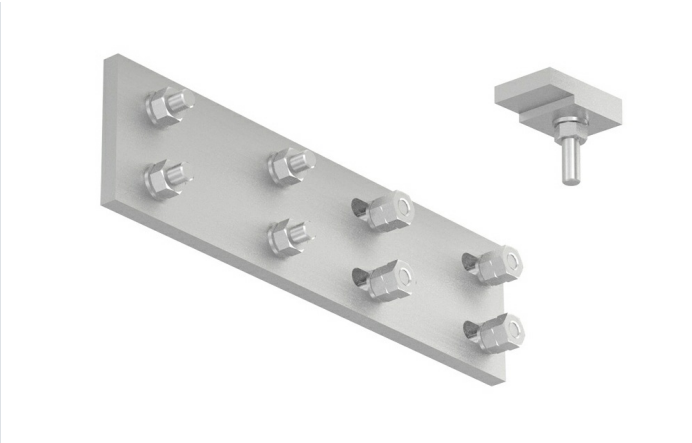

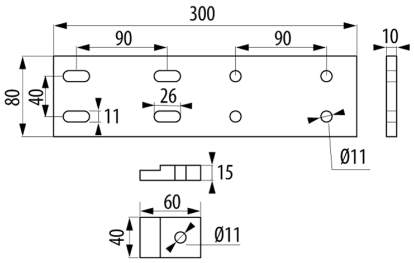


## Description

Straight joint kit for connecting ladder and accessories. Consists of 1 Joint, 1 Fixing Support, 8 DIN933 M10x30 Bolts, 1 DIN933 M10x50 Bolt, 13 DIN934 M10 Nuts, 9 DIN125 M10 Washers, 4 DIN127 Spring Washers. Suitable for all sizes. With AL protection system

## Advantages

In accordance with the IEC 61537 and CE standard with respect to directive 2014/35 / EU.

Made of Aluminum alloy 6063T6. Excellent corrosion resistance.

Electrical continuity guaranteed according to standard IEC61537.

Allows the creation of articulated risers with variable angle for Megaband® CPS.

A versatile piece for using in any coupler element.

## Applications

Suitable for cable conduit installations in the Oil & Gas and Petrochemical Industry, Offshore Platforms, Ports and Maritime Applications in general. Industrial projects in aggressive environments and with high corrosion on the coast and seashore, Power Plants and Renewable Energy.

## Solutions



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# Megaband CPS Straight Joint Kit (KUR) (

Ref: 82002346 )

## Product data

| | | | |
|---|---|---|---|
| **ETIM 10** | EC002413 | **u** | 1 |
| **Huella de CO2. GWP A1-A3 (kg CO2 eq.)** | | **Material** | Aluminum |
| **Protection System** | AL | **Working temperature range (°C)** | -50 / 150 °C |
| **Finish** | 6063T6 Aluminium | **Fire resistance** | A1 No combustible |
| **Flange (mm)** | 100 | | |
| **kg/u** | 1,105 | | |

## Ⓢ Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Ⓜ Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."