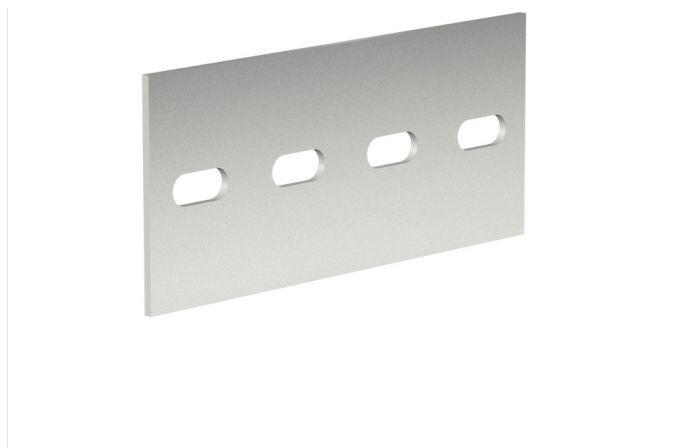


Description

Joint kit for connecting Megaband® REP ladder and accessories. Of 70 mm height. Comprised of M8x20 hexagonal head bolt and M8 metal nut. Suitable for all ladder widths. Made from steel with GC Protection system.

Advantages

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

It allows the connection of Megaband® ladder lengths and the fixing of joints for cut sections.

A versatile piece for using in any coupler element.

GC Protection System, Class 8 according to IEC 61537.

Applications

Adecuado para la fijación de uniones, soportes y estructuras de raíles para instalaciones de bandejas de escalera Megaband® REP en instalaciones eléctricas y de telecomunicaciones y soportar grandes cargas en instalaciones industriales, petroquímicas, Oil&Gas, centrales de energía, minería y cementeras.

Solutions



Product data			
Protection System	GC	u	1
Finish	HDG, Hot Dip Galvanised	Material	Steel with surface coating
Resistance Class	Class 8	Working temperature range (°C)	-50 / 150 °C
Flange (mm)	70	Fire resistance	A1 No combustible
kg/u	0.342		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic