


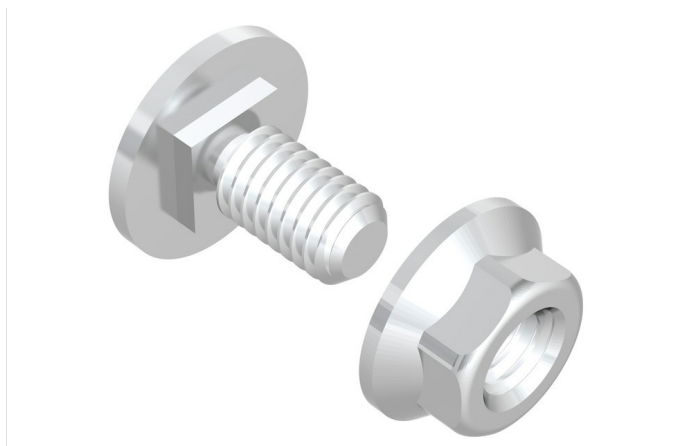

### Description

Joint kit for connecting Pemsaband® PQU AL trays and accessories. Consists of an M6x20 bolt and M6 washer nut. Suitable for all sizes of Pemsaband® PQU AL trays. Made from aluminum alloy 1050H24.

### Advantages

It allows the coupling of straight sections of Pemsaband® PQU cable tray and the fixing of couplers

A versatile piece for using in any coupler element.

CEPSA product approval. Designed according to ESP-2208-5 specification.

CE certified in compliance with the low voltage directive 2014/35 / EU

Made of Aluminum alloy 1050H24. Excellent corrosion resistance and mechanical properties.

### Applications

Suitable for fixing Rejiband® trays to supports for cable management in electrical and telecommunications installations, industrial installations, infrastructure and civil works and the service sector.

### Solutions



 AL
  30, 60
  4
  Aluminum
  -50 / 150 °C
  A1 No combustible
 ETIM 10  
EC002413

|  | Ref      | kg/u  |
|-----------------------------------------------------------------------------------|----------|-------|
| 30                                                                                | 82003192 | 0,402 |
| 60                                                                                | 82003193 | 0,499 |

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

### BK8 - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

### PA12 - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic

