


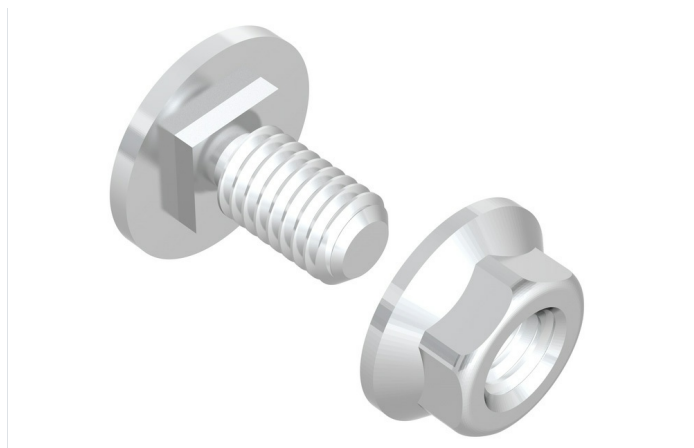

Description

Joint kit for connecting Pemsaband® PQU AL trays and accessories. Consists of an M6x20 bolt and M6 washer nut. Suitable for all sizes of Pemsaband® PQU AL trays. Made from aluminum alloy 1050H24. With AL protection system

Advantages

CE certified in compliance with the low voltage directive 2014/35 / EU

Made of Aluminum alloy 1050H24. Excellent corrosion resistance and mechanical properties.

It allows the coupling of straight sections of Pemsaband® PQU cable tray and the fixing of couplers

A versatile piece for using in any coupler element.

CEPSA product approval. Designed according to ESP-2208-5 specification.

Applications

Suitable for fixing Rejiband® trays to supports for cable management in electrical and telecommunications installations, industrial installations, infrastructure and civil works and the service sector.

Solutions



ETIM 10	EC002413	u	4
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Material	Aluminum
Protection System	AL	Working temperature range (°C)	-50 / 150 °C
Finish	1050H24 Aluminium	Fire resistance	A1 No combustible
Flange (mm)	60		
kg/u	0,499		

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

