


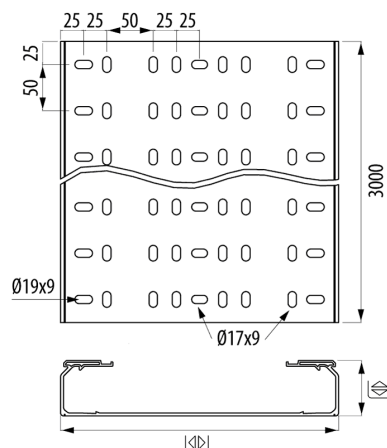

Description

Perforated tray made of insulating material. Of 60 mm height, Width 300 mm. Grey RAL 7035 colour for the support, protection and conduction of cables. Maximum functionality and adaptation to different spaces and environments. Excellent performance in corrosive environments, weathering and exposure to UV radiation. Wide range of accessories with multiple applications. Tray with cover(insulating protective trunking) according to EN 50085. Complies with REACH and ROHS III directives. Free of dangerous substances.

Advantages

Excellent performance in corrosive environments, weather and exposure to UV radiation.

Protection grade IP 2X and Impact Grade 20 J, 10 J 60x100 (EN 61537) and IK10 (EN50085)

The perforations in the longitudinal direction assist in the fixing and clamping of the cables.

Insulating material, electrical safety and reduced maintenance costs.

Non-flame-propagating. Reaction to fire, V0 grade and M1 classification

Applications

Suitable for supporting, protecting and guiding cables in electrical and telecommunications installations in different sectors from wastewater treatment plants to the chemical and petrochemical industry, establishing itself as a highly corrosion-resistant solution that meets the most demanding standards. Its application is also ideal in other different sectors: service, telecommunications, electric mobility through vehicle charging stations etc.

Solutions




Product data			
ETIM 10		EC000047	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		0,006	
Colour		Grey RAL 7035	
Flange (mm)		60	
Width (mm)		300	
Length (m)		3	
kg/u		2,413	
u		12	
Material		PVC	
Impact Strength (J)		20 J	
Section (mm2)		14689	
IP		IP23	
Working temperature range (°C)		-20 / 60 °C	
Fire resistance		GRADO UL94: V0	
UV Behaviour		Resistant acc. to UL568	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Load diagrams

Cargas de trabajo admisibles (CTA) y datos dimensionales / *Safety working loads (SWL) and dimensional data*
Charges de travail admissibles (CTA) et données dimensionnelles / *Cargas de trabalho admissíveis (CTA) e dados dimensionais*



Bandejas **metatray**® perforadas y ciegas / *Perforated and solid metatray*® cable trays
Chemins de câbles metatray® perforés et pleins / *Caminhos de cabos metatray*® perfurados e não perfurados

Secciones útiles mm² / *Useful cross sections mm²* / *Sections utiles mm²* / *Secções úteis mm²*


 x 	60x100	60x150	60x200	60x300	60x400	100x200	100x300	100x400	100x500	100x600
mm ²	4666	7183	9692	14869	19934	16611	25229	33825	42360	50917

Ensayos Carga de trabajo admisible (CTA) para bandejas (N/m) / *Safety working loads (SWL) tests for cable trays (N/m)* /
Essais de charge de travail admissible (CTA) pour les chemins de câbles (N/m) / *Ensaíos Carga de trabalho admissível (CTA) para*
caminhos de cabos (N/m)

		60x100	60x150	60x200	60x300	60x400	100x200	100x300	100x400	100x500	100x600
60°C	1 m	120	150	250	350	450	400	450	600	700	800
40°C	1,5 m										

Los ensayos CTA de las medidas de 300 a 600 han sido realizados con las uniones centrales refuerzo, referencias 82004223 y 82004224. / *The SWL tests from 300 to 600 were performed with the reinforced central joints, references 82004223 and 82004224.*

Condiciones del ensayo de carga de trabajo admisible para bandejas EN 61537 / *Safety working load test conditions for cable trays EN 61537* / *Conditions de l'essai de charge de travail admissible pour les chemins de câbles selon la norme EN 61537* / *Condições do ensaio de carga de trabalho admissível para caminhos de cabos EN 61537*

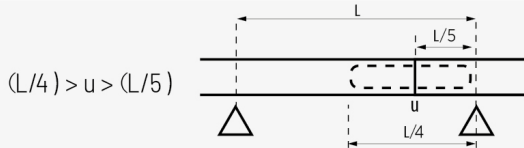Temperatura / <i>Temperature</i> / <i>Température</i> / <i>Temperatura</i>	40°C	60°C
 Distancia entre soportes / <i>Support Span</i> / <i>Distance entre les supports</i> / <i>Distância entre suportes</i>	1,5 m	1 m
Flecha longitudinal / <i>Longitudinal deflection</i> / <i>Flèche longitudinale</i> / <i>Seta longitudinal</i>	Inferior al 1% de distancia entre soportes / <i>Less than 1% support span</i> / <i>Inférieure à 1 % de la distance entre les supports</i> / <i>Inferior a 1% de distância entre suportes</i>	
Flecha transversal / <i>Transverse deflection</i> / <i>Flèche transversale</i> / <i>Seta transversal</i>	Inferior al 5% del ancho de la bandeja / <i>Less than 5% of the cable tray width</i> / <i>Inférieure à 5 % de la largeur du chemin de câbles</i> / <i>Inferior a 5% da largura do caminho de cabos</i>	
Ubicación de uniones <i>Placement of joints</i> <i>Emplacement des éclisses</i> <i>Localização de uniões</i>	 $(L/4) > u > (L/5)$	
Factor de seguridad sin alcanzar colapso <i>Increased safety coefficient</i> <i>Facteur de sécurité sans effondrement</i> <i>Fator de segurança sem alcançar colapso</i>	1,7 veces la carga de trabajo de seguridad declarada <i>1.7 times the declared safety working load</i> 1,7 fois la charge de travail sécurisée déclarée 1,7 vezes a carga de trabalho de segurança declarada	

Product applications



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

