


Insert-P

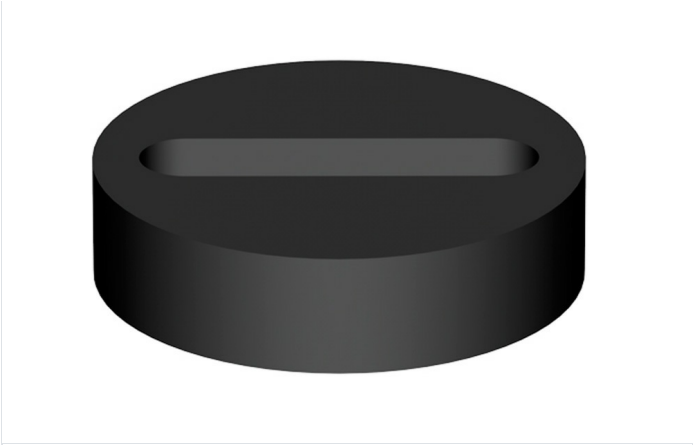

Description

Advantages

Applications

Solutions



Main technical characteristics

Colour	Black RAL 9005		7, 8, 10, 12, 14		13, 15, 22, 28, 33, 45		PG16, PG21, PG29, PG36, PG42, PG48		NBR		IP65
	-40 / 100 °C		LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA			ETIM	-				

Product data

				Ref	kg/u	
7	13	PG16	18	40030116	0.002	25
7	15	PG21	22	40030121	0.003	25
8	22	PG29	30	40030129	0.009	5
10	28	PG36	39	40030136	0.011	5
12	33	PG42	45	40030142	0.013	5
14	45	PG48	51	40030148	0.015	5

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

