
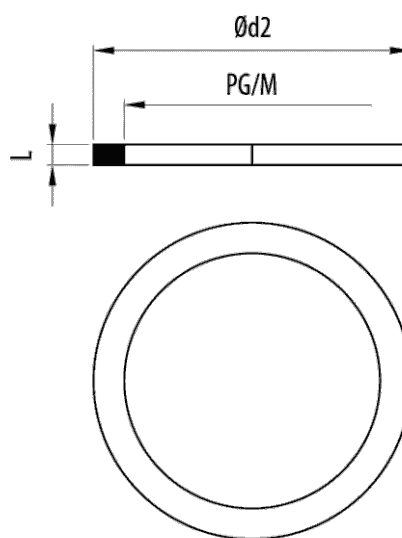


Flat Ring

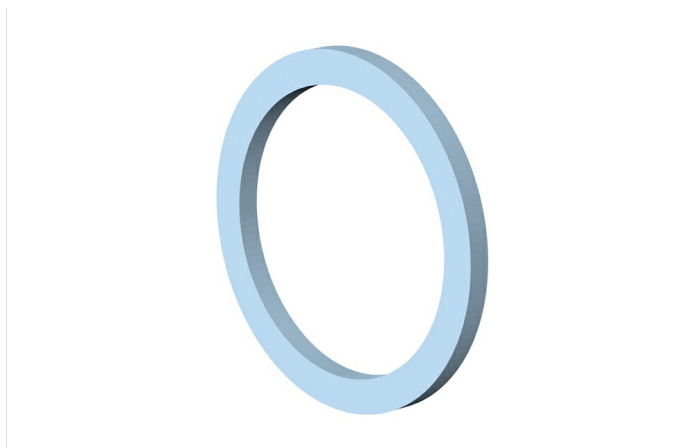

Description

Advantages

Applications

Solutions



Main technical characteristics

Colour	Blue RAL 5024	PG	PG 7, PG 9, PG11, PG13, PG16, PG21, PG29, PG36, PG48, M12, M16, M20, M25, M32, M40, M50, M63	Lmm	2	M	NBR
IP	IP68	Temp	-25 / 120 °C	Flame	retardant	ETIM	10 EC001181

Product data

PG	Ød	Ref	kg/u	kg
PG 7	16.5	39090007	0,001	500
PG 9	19	39090009	0,001	500
PG11	22.5	39090011	0,002	500
PG13	25	39090013	0,003	500
PG16	27	39090016	0,003	500
PG21	33.5	39090021	0,005	500
PG29	43.5	39090029	0,009	250
PG36	55	39090036	0,018	100
PG48	69	39090048	0,025	50
M12	16	39090112	0,001	500
M16	20	39090116	0,001	500
M20	25	39090120	0,002	500
M25	31	39090125	0,003	500
M32	38	39090132	0,003	250
M40	48	39090140	0,005	100
M50	58	39090150	0,009	50
M63	72	39090163	0,018	50

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6

Flat Ring

- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic

