


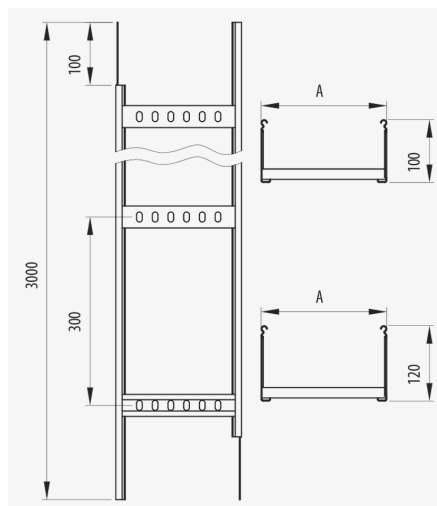

Description

Ladder designed for industrial environments with high loads. The Megaband® ladder consists of welded and alternating rungs, 100 and 120 mm high and safety edge to protect and strengthen the ladder. Assembly using the Click system for quick connection between sections and accessories. Made of steel, in various sizes and Protection Systems. It is supplied in 3 metre sections.

Advantages

Excellent robotic welding of rungs to the siderails. Maximum load capacity guaranteed.

The rungs are mounted alternately up and down to allow the fixing of the cables.

Joining of ladder using the Click connector system.

In accordance with IEC 61537 standard. Conforms to NEMA VE-1 standards. CE conformance with directive 2014/35 / EU.

Wide variety of sizes, protection systems and accessories to adapt to the requirements of each electrical installation.

Applications

Channeling, Protection and distribution of cables in Electrical installations in Industrial applications: Power Plants, Petrochemical, Chemical, Oil & Gas. Exterior applications with humid environments.

Solutions



INDUSTRIA PETROQUÍMICA ENERGÍA



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Main technical characteristics

 100, 120

100, 150, 200, 300, 400, 450, 500, 600, 750, 900

 3 3

20 j

 A1 No combustible

ETIM

EC000854

Product data

Ⓢ	Class EC 61537	Ⓢ	Ⓢ	Ref	kg/u	Ⓢ	e _{mm}	mm²	Ⓢ
PG	Class 3	100	100	92014100	3.060	Steel with surface coating	1.5	7318	-50 / 150 °C
PG	Class 3	100	150	92014150	3.200	Steel with surface coating	1.5	11118	-50 / 150 °C
PG	Class 3	100	200	92014200	3.340	Steel with surface coating	1.5	15118	-50 / 150 °C
PG	Class 3	100	300	92014300	3.630	Steel with surface coating	1.5	22918	-50 / 150 °C
PG	Class 3	100	400	92014400	3.910	Steel with surface coating	1.5	30718	-50 / 150 °C
PG	Class 3	100	450	92014450	4.060	Steel with surface coating	1.5	34518	-50 / 150 °C
PG	Class 3	100	500	92014500	4.190	Steel with surface coating	1.5	38518	-50 / 150 °C
PG	Class 3	100	600	92014600	4.470	Steel with surface coating	1.5	46318	-50 / 150 °C
PG	Class 3	100	750	92014750	4.900	Steel with surface coating	2	57918	-50 / 150 °C
PG	Class 3	100	900	92014900	5.310	Steel with surface coating	2	69718	-50 / 150 °C
PG	Class 3	120	100	92015100	3.530	Steel with surface coating	1.5	9238	-50 / 150 °C
PG	Class 3	120	150	92015150	3.680	Steel with surface coating	1.5	14138	-50 / 150 °C
PG	Class 3	120	200	92015200	3.820	Steel with surface coating	1.5	19038	-50 / 150 °C
PG	Class 3	120	300	92015300	4.100	Steel with surface coating	1.5	28838	-50 / 150 °C
PG	Class 3	120	400	92015400	4.380	Steel with surface coating	1.5	38638	-50 / 150 °C
PG	Class 3	120	450	92015450	4.540	Steel with surface coating	1.5	43538	-50 / 150 °C
PG	Class 3	120	500	92015500	4.660	Steel with surface coating	1.5	48438	-50 / 150 °C
PG	Class 3	120	600	92015600	4.950	Steel with surface coating	1.5	58238	-50 / 150 °C
PG	Class 3	120	750	92015750	5.380	Steel with surface coating	2	72938	-50 / 150 °C
PG	Class 3	120	900	92015900	5.790	Steel with surface coating	2	87638	-50 / 150 °C
GC	Class 6	100	100	92034100	3.220	Steel with surface coating	1.5	7318	-50 / 150 °C
GC	Class 6	100	150	92034150	3.360	Steel with surface coating	1.5	11118	-50 / 150 °C
GC	Class 6	100	200	92034200	3.510	Steel with surface coating	1.5	15118	-50 / 150 °C
GC	Class 6	100	300	92034300	3.810	Steel with surface coating	1.5	22918	-50 / 150 °C
GC	Class 6	100	400	92034400	4.110	Steel with surface coating	1.5	30718	-50 / 150 °C
GC	Class 6	100	450	92034450	4.270	Steel with surface coating	1.5	34518	-50 / 150 °C
GC	Class 6	100	500	92034500	5.260	Steel with surface coating	1.5	38518	-50 / 150 °C
GC	Class 6	100	600	92034600	5.560	Steel with surface coating	1.5	46318	-50 / 150 °C
GC	Class 6	100	750	92034750	6.020	Steel with surface coating	2	57918	-50 / 150 °C
GC	Class 6	100	900	92034900	6.450	Steel with surface coating	2	69718	-50 / 150 °C
GC	Class 6	120	100	92035100	3.720	Steel with surface coating	1.5	9238	-50 °C
GC	Class 6	120	150	92035150	3.860	Steel with surface coating	1.5	14138	-50 °C
GC	Class 6	120	200	92035200	4.020	Steel with surface coating	1.5	19038	-50 °C
GC	Class 6	120	300	92035300	4.310	Steel with surface coating	1.5	28838	-50 °C
GC	Class 6	120	400	92035400	4.610	Steel with surface coating	1.5	38638	-50 °C
GC	Class 6	120	450	92035450	4.770	Steel with surface coating	1.5	43538	-50 °C
GC	Class 6	120	500	92035500	5.920	Steel with surface coating	1.5	48438	-50 °C



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Reijband, Pemsaband, Inducanal, Reijtech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Ⓢ	EN 61537	Ⓜ	Ⓜ	Ref	kg/u	Ⓜ	e _{perm}	mm ²	°C
GC	Class 6	120	600	92035600	6.220	Steel with surface coating	1.5	58238	-50 °C
GC	Class 6	120	750	92035750	6.680	Steel with surface coating	2	72938	-50 °C
GC	Class 6	120	900	92035900	7.110	Steel with surface coating	2	87638	-50 °C
INOX	Class 9C	100	100	92054100	3.010	Stainless steel AISI 304	1.5	7318	-50 °C
INOX	Class 9C	100	150	92054150	3.140	Stainless steel AISI 304	1.5	11118	-50 °C
INOX	Class 9C	100	200	92054200	3.290	Stainless steel AISI 304	1.5	15118	-50 °C
INOX	Class 9C	100	300	92054300	3.560	Stainless steel AISI 304	1.5	22918	-50 °C
INOX	Class 9C	100	400	92054400	3.840	Stainless steel AISI 304	1.5	30718	-50 °C
INOX	Class 9C	100	450	92054450	3.990	Stainless steel AISI 304	1.5	34518	-50 °C
INOX	Class 9C	100	500	92054500	4.400	Stainless steel AISI 304	1.5	38518	-50 °C
INOX	Class 9C	100	600	92054600	4.390	Stainless steel AISI 304	1.5	46318	-50 °C
INOX	Class 9C	100	750	92054750	4.820	Stainless steel AISI 304	1.5	57918	-50 °C
INOX	Class 9C	100	900	92054900	5.230	Stainless steel AISI 304	1.5	69718	-50 °C
INOX	Class 9C	120	100	92055100	3.480	Stainless steel AISI 304	1.5	9238	-50 °C
INOX	Class 9C	120	150	92055150	3.610	Stainless steel AISI 304	1.5	14138	-50 °C
INOX	Class 9C	120	200	92055200	3.760	Stainless steel AISI 304	1.5	19038	-50 °C
INOX	Class 9C	120	300	92055300	4.030	Stainless steel AISI 304	1.5	28838	-50 °C
INOX	Class 9C	120	400	92055400	4.310	Stainless steel AISI 304	1.5	38638	-50 °C
INOX	Class 9C	120	450	92055450	4.460	Stainless steel AISI 304	1.5	43538	-50 °C
INOX	Class 9C	120	500	92055500	4.500	Stainless steel AISI 304	1.5	48438	-50 °C
INOX	Class 9C	120	600	92055600	4.860	Stainless steel AISI 304	1.5	58238	-50 °C
INOX	Class 9C	120	750	92055750	5.300	Stainless steel AISI 304	1.5	72938	-50 °C
INOX	Class 9C	120	900	92055900	5.700	Stainless steel AISI 304	1.5	87638	-50 °C
INOX	Class 9D	100	100	92064100	3.010	Acero inoxidable AISI 316L	1.5	7318	-50 °C
INOX	Class 9D	100	150	92064150	3.140	Acero inoxidable AISI 316L	1.5	11118	-50 °C
INOX	Class 9D	100	200	92064200	3.290	Acero inoxidable AISI 316L	1.5	15118	-50 °C
INOX	Class 9D	100	300	92064300	3.560	Acero inoxidable AISI 316L	1.5	22918	-50 °C
INOX	Class 9D	100	400	92064400	3.840	Acero inoxidable AISI 316L	1.5	30718	-50 °C
INOX	Class 9D	100	450	92064450	3.990	Acero inoxidable AISI 316L	1.5	34518	-50 °C
INOX	Class 9D	100	500	92064500	3.580	Acero inoxidable AISI 316L	1.5	38518	-50 °C
INOX	Class 9D	100	600	92064600	4.390	Acero inoxidable AISI 316L	1.5	46318	-50 °C
INOX	Class 9D	100	750	92064750	4.820	Acero inoxidable AISI 316L	1.5	57918	-50 °C
INOX	Class 9D	100	900	92064900	5.230	Acero inoxidable AISI 316L	1.5	69718	-50 °C
INOX	Class 9D	120	100	92065100	3.480	Acero inoxidable AISI 316L	1.5	9238	-50 °C
INOX	Class 9D	120	150	92065150	3.610	Acero inoxidable AISI 316L	1.5	14138	-50 °C
INOX	Class 9D	120	300	92065300	4.030	Acero inoxidable AISI 316L	1.5	28838	-50 °C
INOX	Class 9D	120	400	92065400	4.310	Acero inoxidable AISI 316L	1.5	38638	-50 °C
INOX	Class 9D	120	450	92065450	4.460	Acero inoxidable AISI 316L	1.5	43538	-50 °C
INOX	Class 9D	120	500	92065500	4.500	Acero inoxidable AISI 316L	1.5	48438	-50 °C
INOX	Class 9D	120	600	92065600	4.860	Acero inoxidable AISI 316L	1.5	58238	-50 °C
INOX	Class 9D	120	750	92065750	5.300	Acero inoxidable AISI 316L	1.5	72938	-50 °C



				Ref	kg/u			mm ²	
INOX	Class 9D	120	900	92065900	5.700	Acero inoxidable AISI 316L	1.5	87638	-50 °C

 Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

 Insulating materials




- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic

Load diagrams

 mm	 mm	Sección mm²
100	100	7.318
	150	11.118
	200	15.118
	300	22.918
	400	30.718
	450	34.518
	500	38.518
	600	46.318
	700	54.118
	750	57.918
	800	61.918
	900	69.718
	1000	77.518

 mm	 mm	Sección mm²
120	100	9.238
	150	14.138
	200	19.038
	300	28.838
	400	38.638
	450	43.538
	500	48.438
	600	58.238
	700	68.038
	750	72.938
	800	77.838
	900	87.638
	1000	97.438

 mm	 mm	mm²
150	100	12.028
	150	18.453
	200	24.878
	300	37.728
	400	50.578
	450	57.003
	500	63.428
	600	76.278
	700	89.128
	750	95.553
	800	101.978
	900	114.828
	1000	127.678

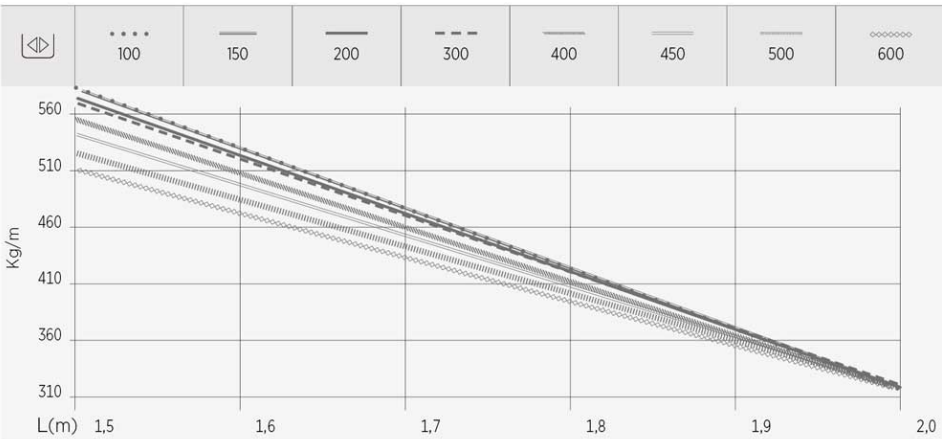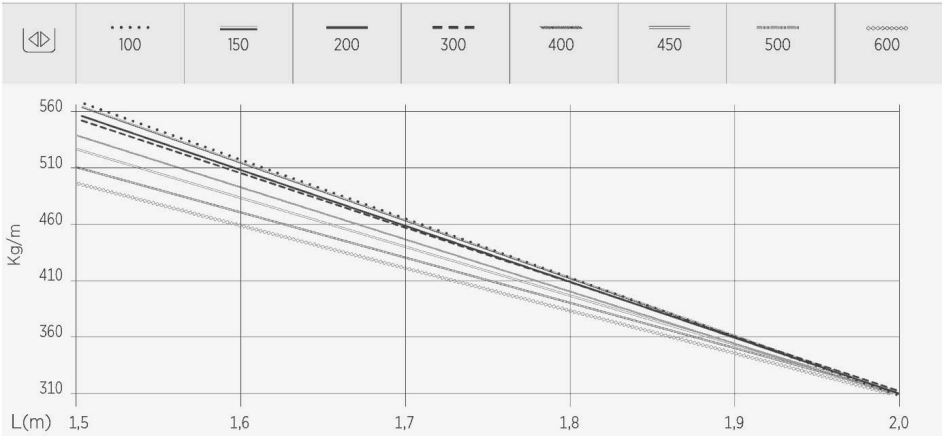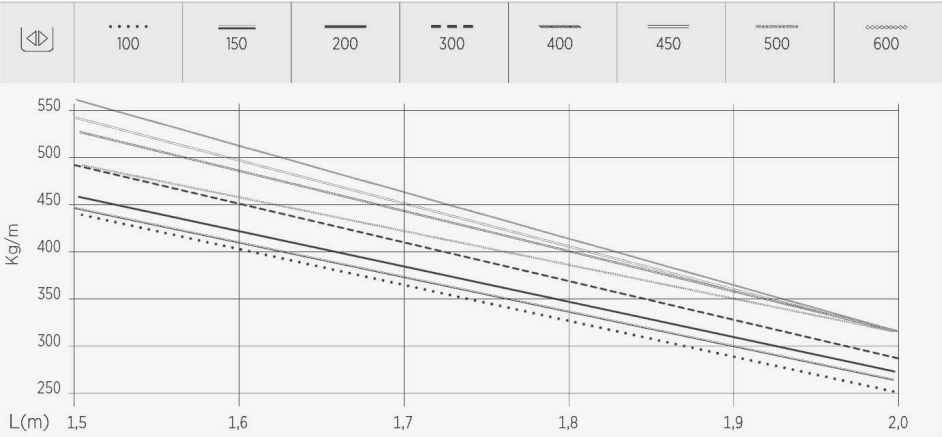

Product applications



