
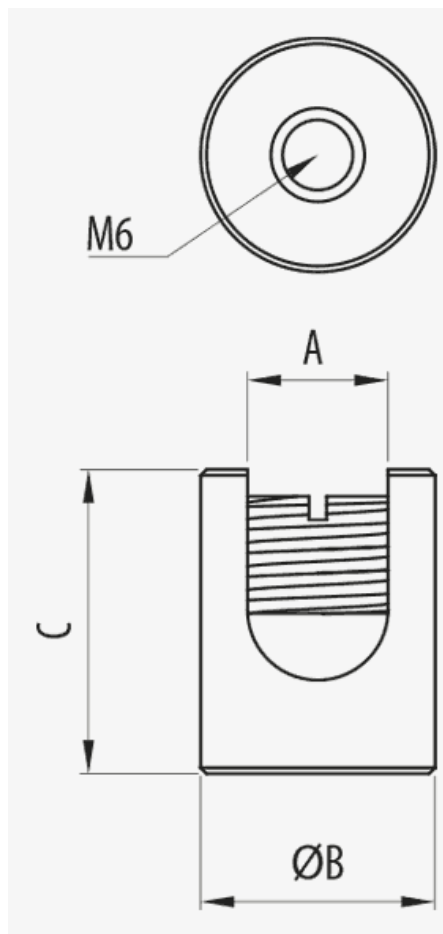


Bonding Connector (Ref: 68000034)

1/18

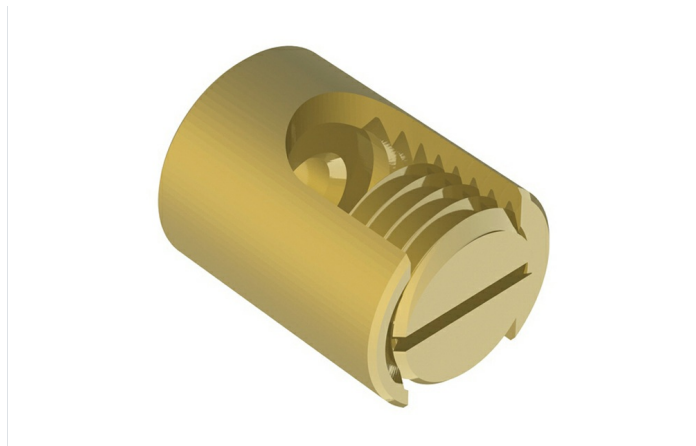

Description

Brass terminal for the equipotential bonding of the Pemsaband® tray and Megaband® ladder or for their connection to the protective conductor and earthing of the electrical installation. Cables of 16-50 mm² of section, Of 4.5 / 8 mm of maximum diameter, With LTN protection system

Advantages

Ensures the equipotentiality of the continuous sections of Pemsaband®.

Economical and reliable design.

It facilitates the earthing of the Pemsaband® tray.

Select the reference according to the size of the conductor.

Applications

It is used for the equipotential connection of the Pemsaband® tray and Megaband® ladder or for their connection to the protective conductor and earthing of the electrical installation.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Bonding Connector (Ref: 68000034)

2/18

Product data

ETIM 10	EC002935	B (mm)	50
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		kg/u	0,024
Protection System	LTN	u	20
Finish	Brass	Material	Brass
Section min (mm2)	16	Working temperature range (°C)	-50 / 150 °C
Cable diameter range	4.5 / 8		
A (mm)	16		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic




www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."




Product applications

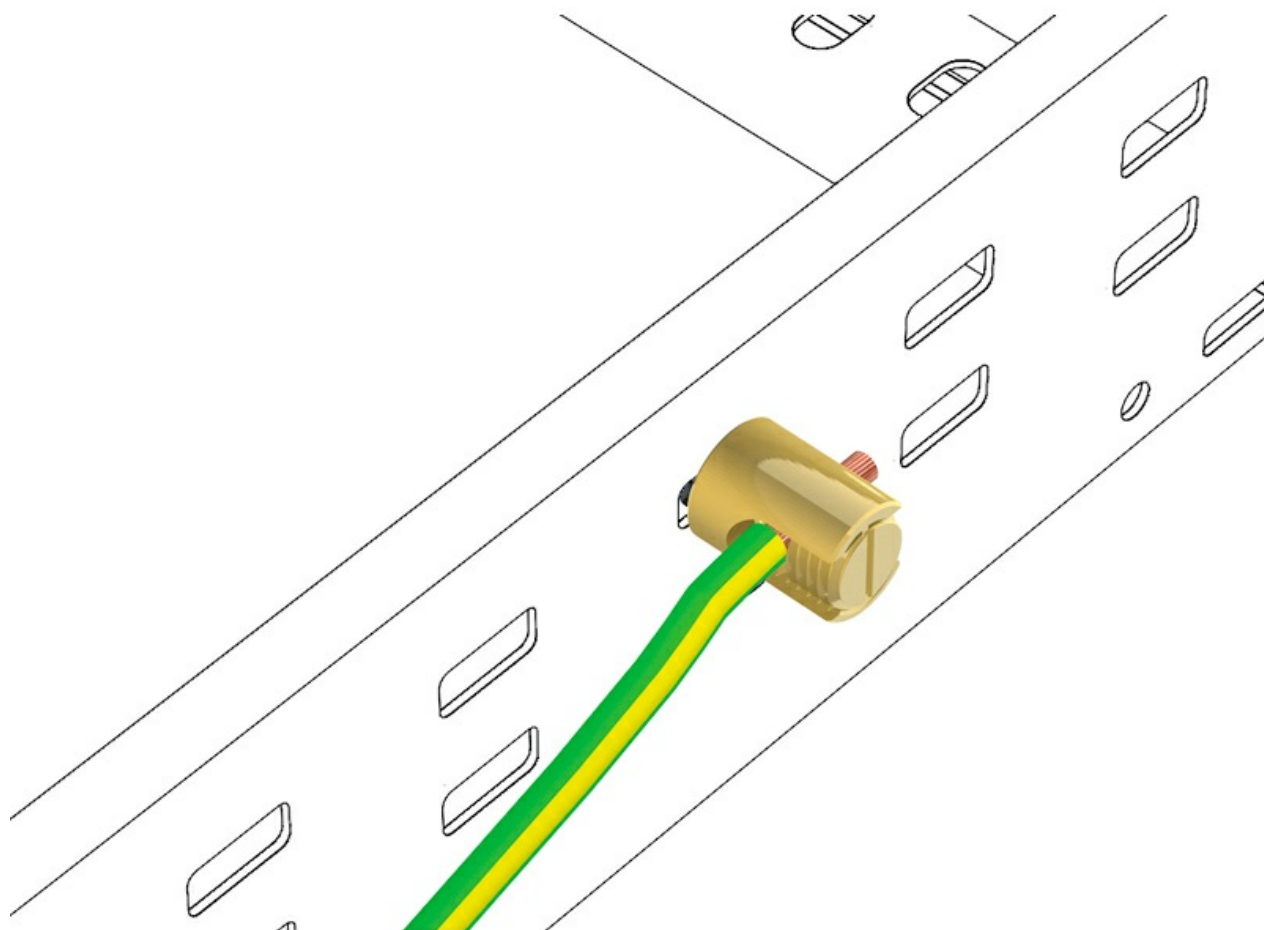


Bonding Connector (Ref: 68000034)

4/18

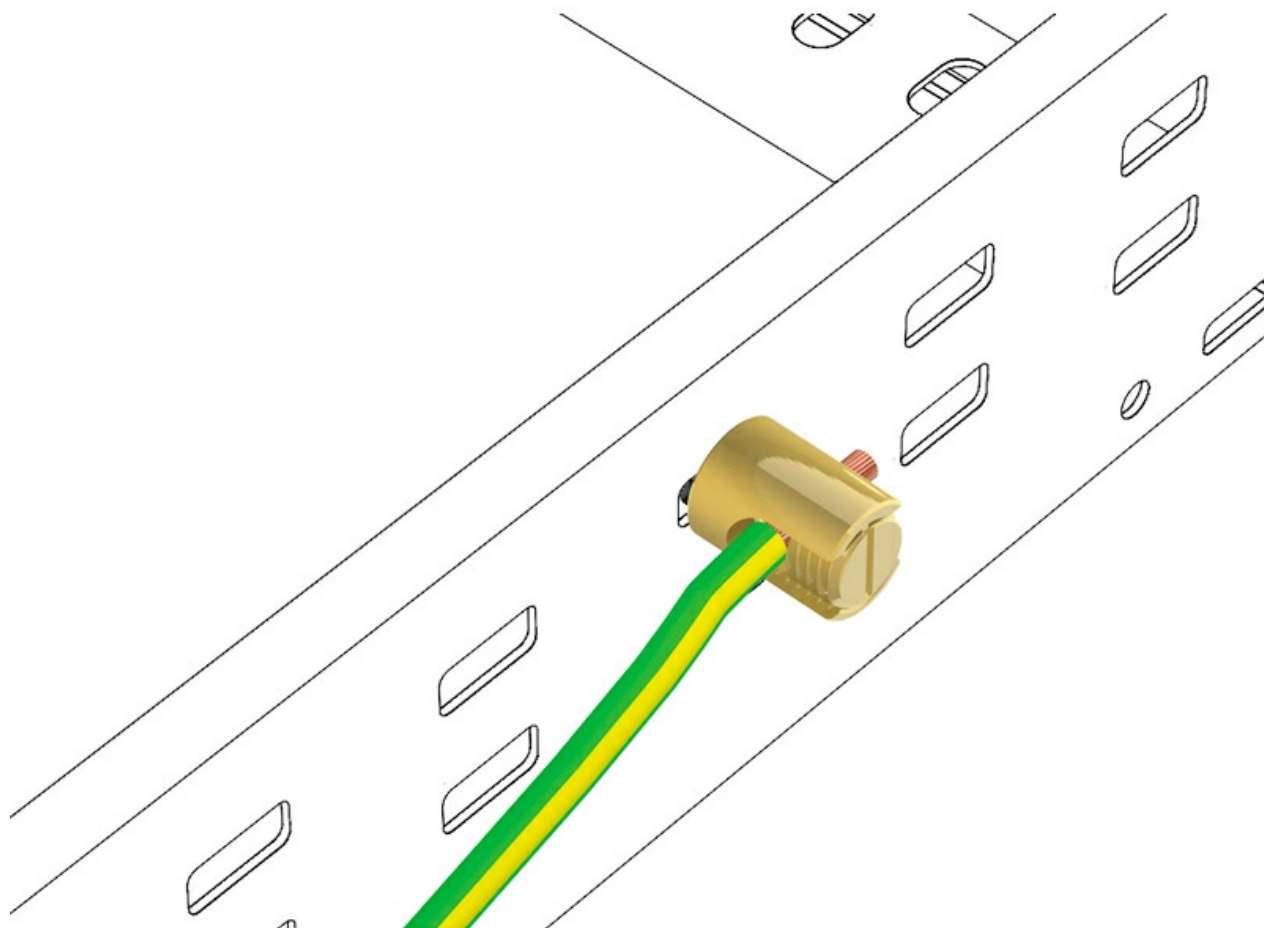


Bonding Connector (Ref: 68000034)

5/18

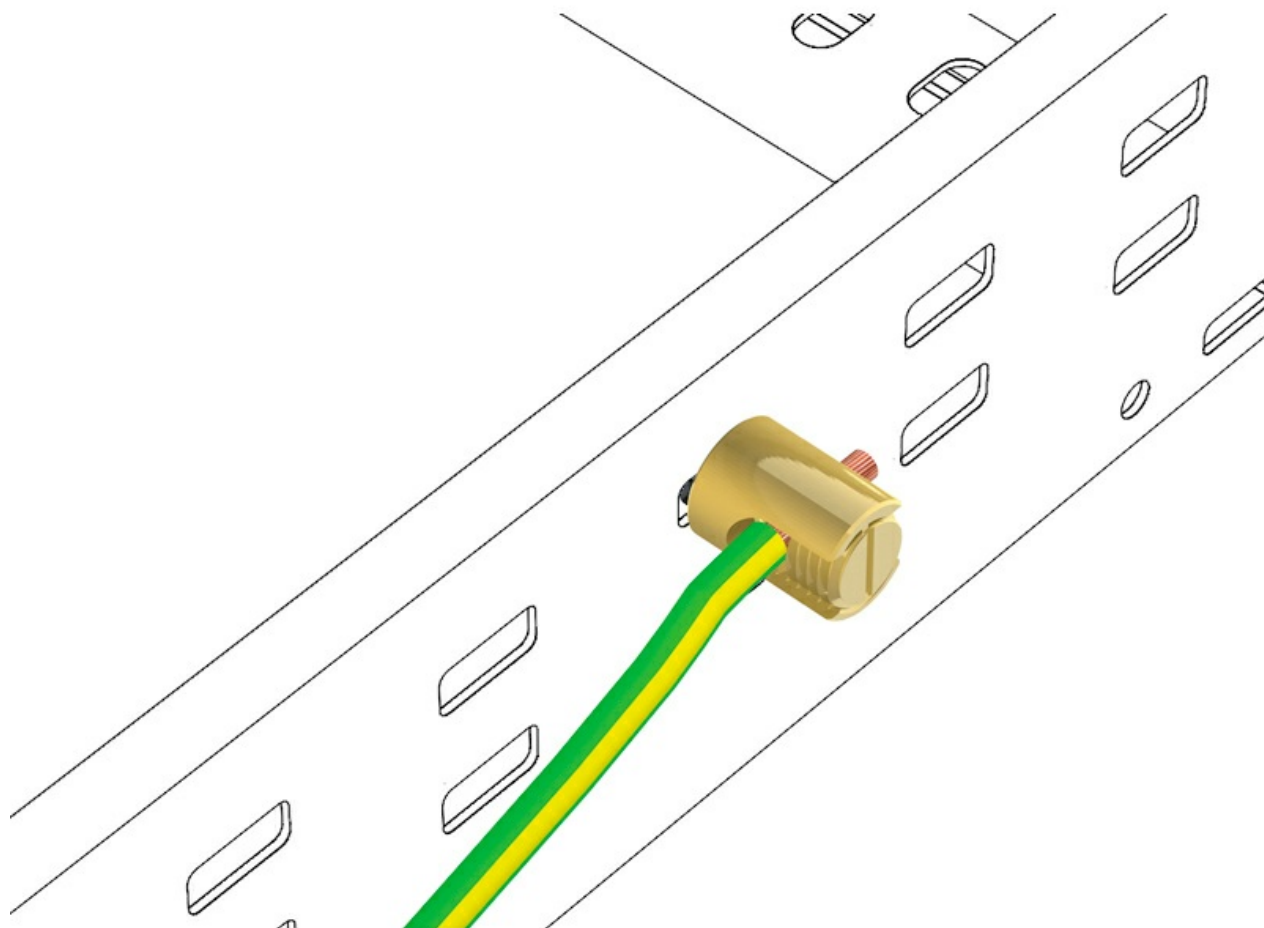

Bonding Connector (Ref: 68000034)

6/18

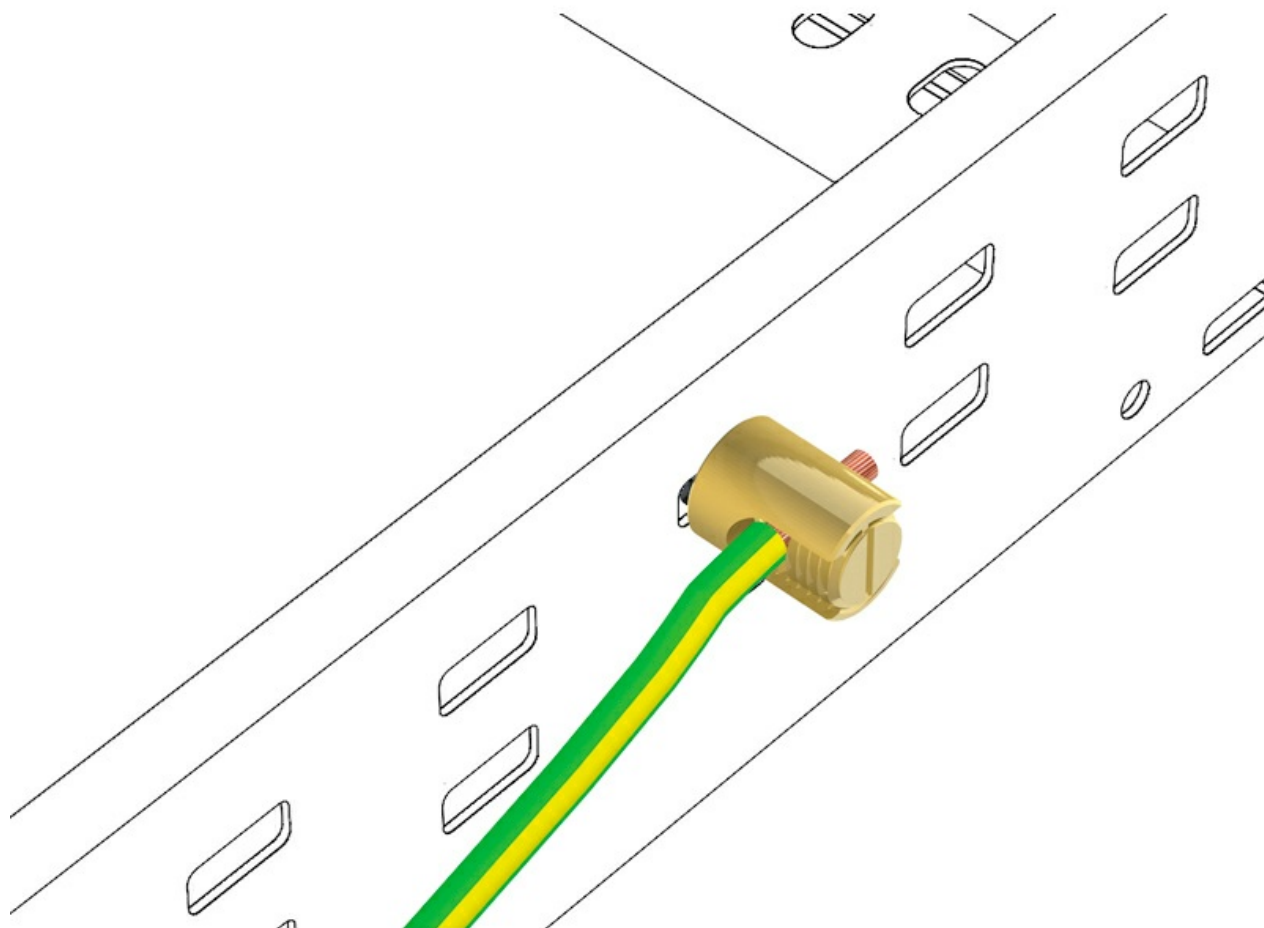







Bonding Connector (Ref: 68000034)

9/18

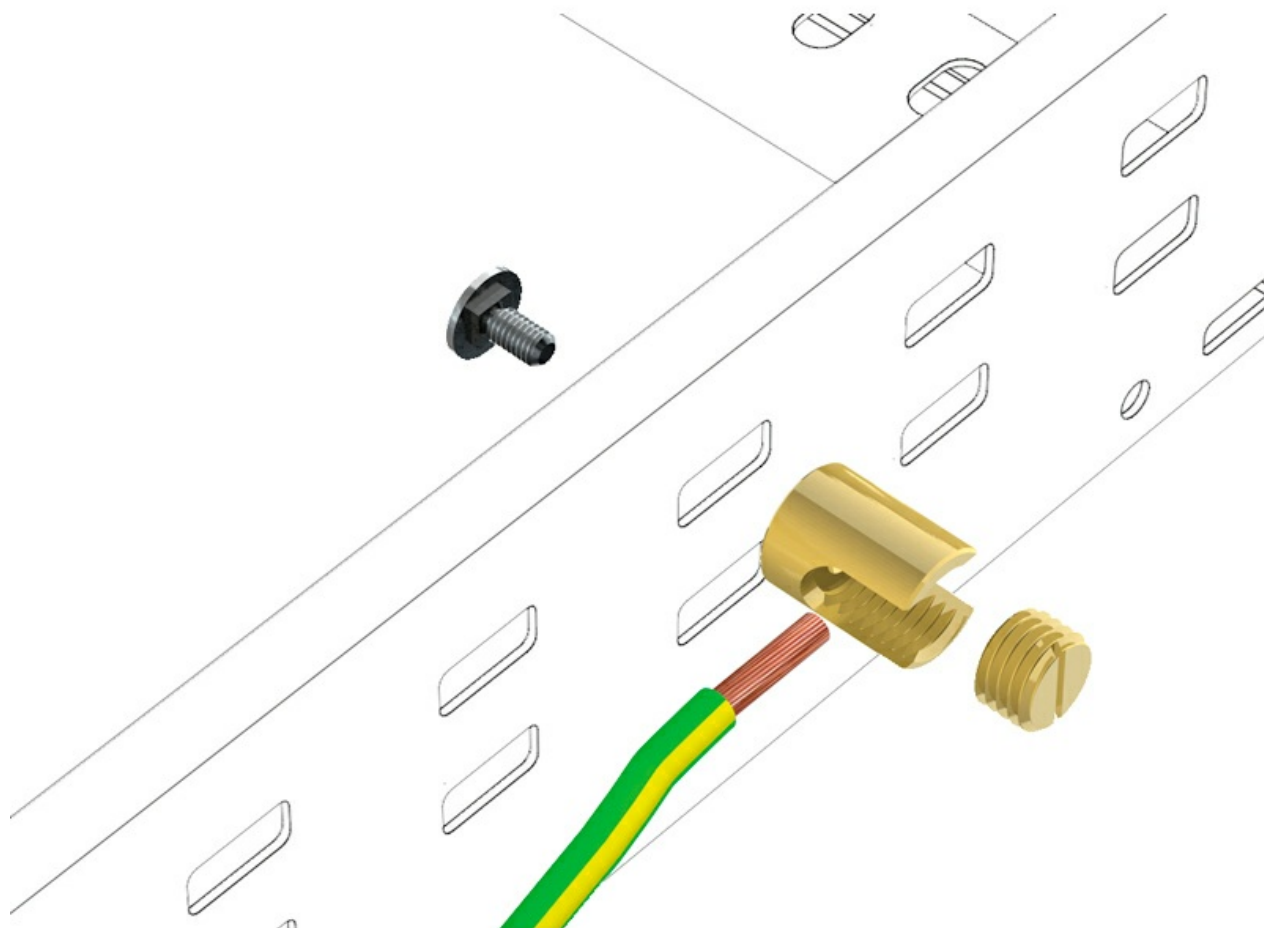

Bonding Connector (Ref: 68000034)

10/18

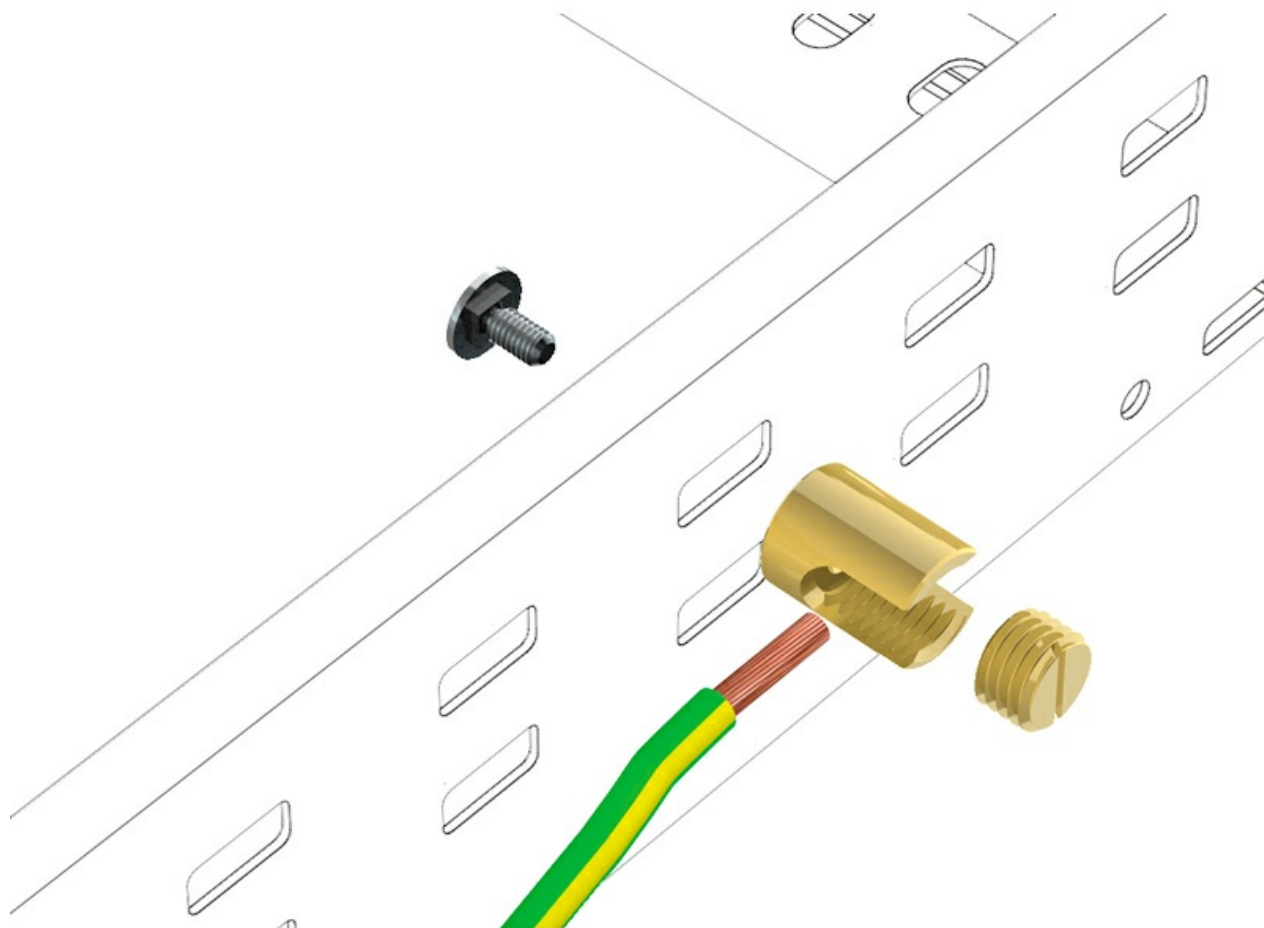



www.pemsa-rejiband.com


Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."





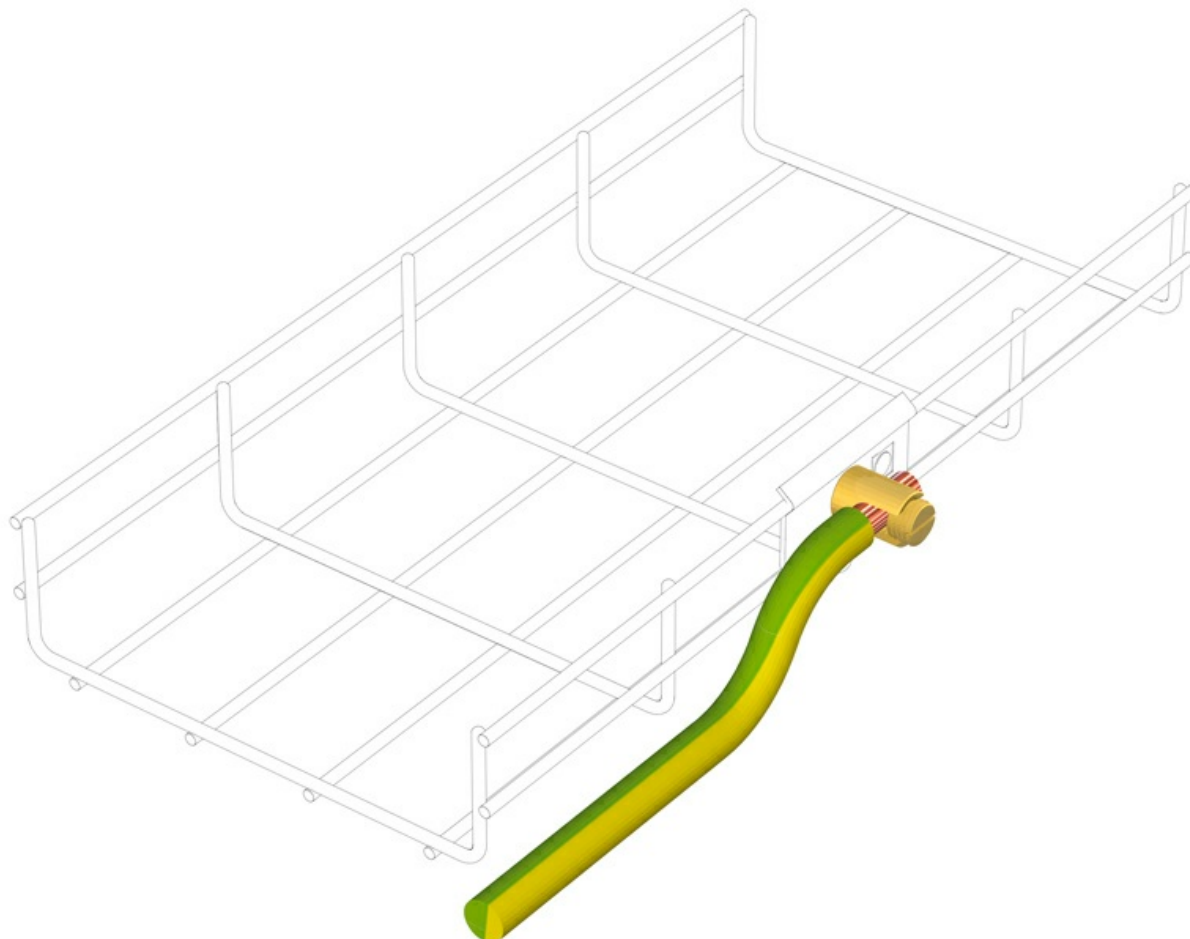

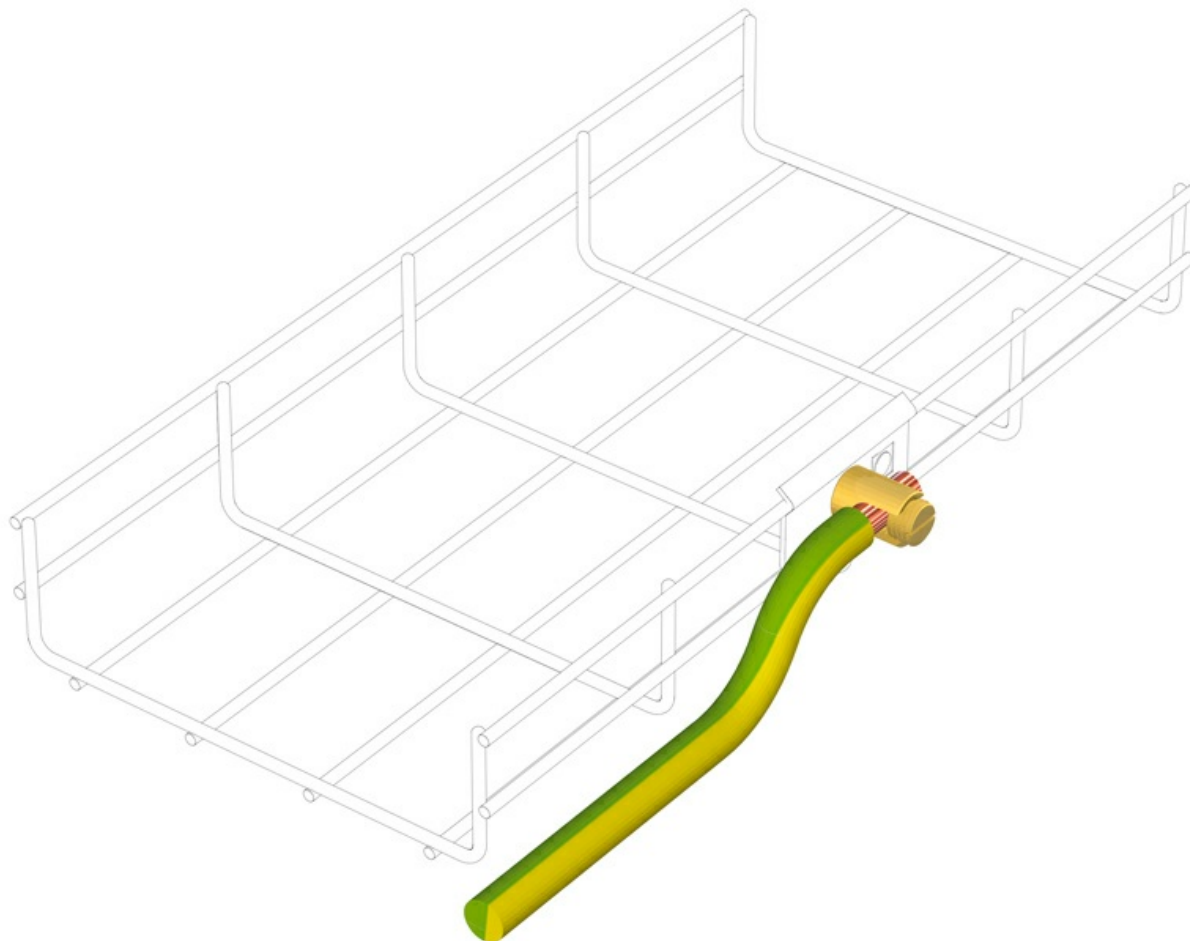

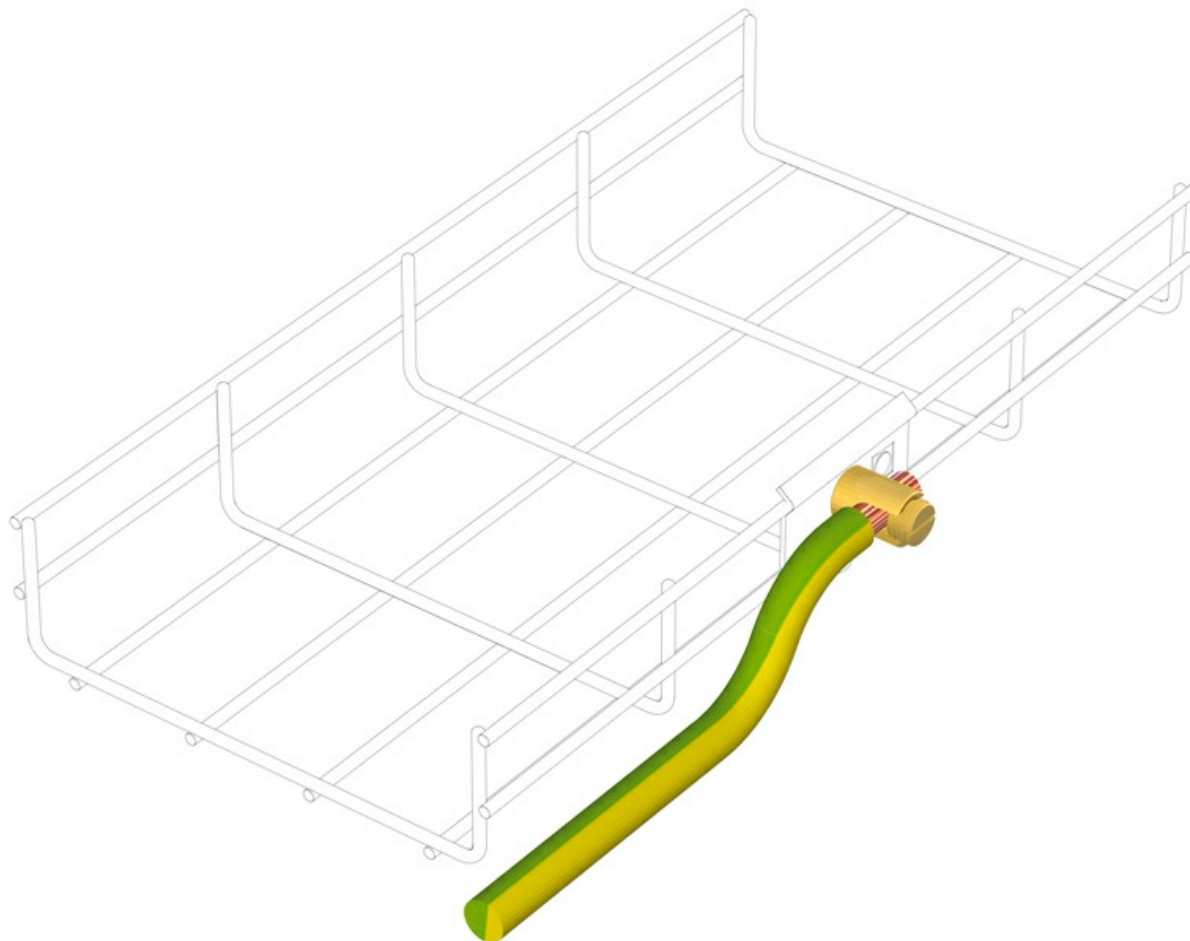

Bonding Connector (Ref: 68000034)

15/18

