

# Nemaband Equal Reducer ( Ref: 82003091 )

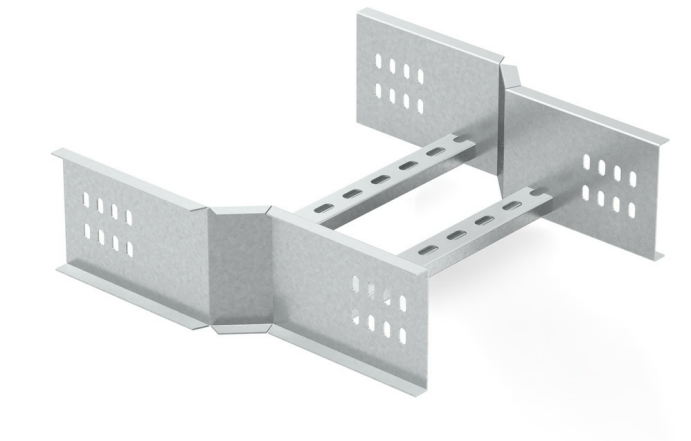

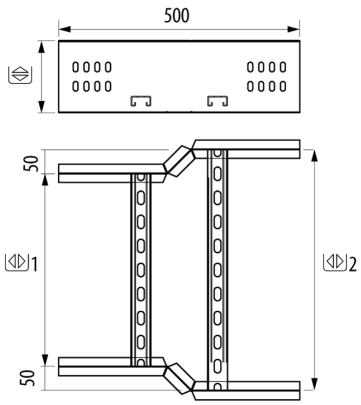


## Description

Metal accessory for creating an equal reduction between two sections of Nemaband® ladder. Of 150 mm height, Width 300 mm, With a reduction of 150 mm. 150mm reduction. It allows changes in the width of different sections to be made very easily using a single piece. Made from steel with GC Protection system.

## Advantages

Precise adjustment and maximum resistance.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Available in 100 and 150 mm height and 150, 300, 450, 600, 750 and 900 mm wide.

It allows the creation of width changes to adapt to the demands of each electrical installation.

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

## Applications

Suitable for creating width reductions in Nemaband® ladder for routing, protecting and distributing cables in electrical installations in industrial applications and large spans in: Oil & Gas and Petrochemical Industry, Power Plants, Electric Power Plants, etc. Water Treatment, Mining and Cement Offshore Platforms, Ports, Maritime Applications. Industrial projects in aggressive environments.

## Solutions



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# Nemaband Equal Reducer ( Ref: 82003091 )

## Product data

| | | | |
|---|---|---|---|
| **ETIM 10** | EC001011 | **kg/u** | 3,800 |
| **Huella de CO2. GWP A1-A3 (kg CO2 eq.)** | 9,842 | **u** | 1 |
| **Protection System** | GC | **Material** | Steel with surface coating |
| **Finish** | HDG, Hot Dip Galvanised | **Impact Strength (J)** | 20 J |
| **Resistance Class** | Class 8 | **Working temperature range (°C)** | -50 / 150 °C |
| **Flange (mm)** | 150 | **Fire resistance** | A1 No combustible |
| **Width (mm)** | 300 | | |
| **Reduce to:** | 150 | | |
| **R (mm)** | 300 | | |

## Ⓢ Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Ⓜ Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."