
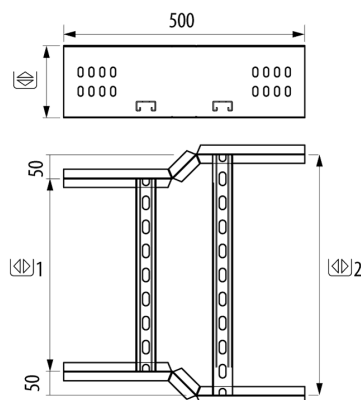


Nemaband Equal Reducer (Ref: 82003094)

1/2

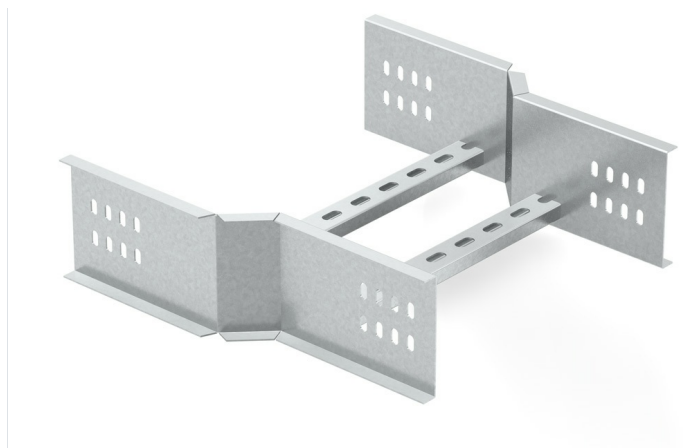

Description

Metal accessory for creating an equal reduction between two sections of Nemaband® ladder. Of 150 mm height, Width 750 mm, With a reduction of 600 mm. 150mm reduction. It allows changes in the width of different sections to be made very easily using a single piece. Made from steel with GC Protection system.

Advantages

Precise adjustment and maximum resistance.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Available in 100 and 150 mm height and 150, 300, 450, 600, 750 and 900 mm wide.

It allows the creation of width changes to adapt to the demands of each electrical installation.

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

Applications

Suitable for creating width reductions in Nemaband® ladder for routing, protecting and distributing cables in electrical installations in industrial applications and large spans in: Oil & Gas and Petrochemical Industry, Power Plants, Electric Power Plants, etc. Water Treatment, Mining and Cement Offshore Platforms, Ports, Maritime Applications. Industrial projects in aggressive environments.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data			
ETIM 10		EC001011	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		13,39	
Protection System		GC	
Finish		HDG, Hot Dip Galvanised	
Resistance Class		Class 8	
Flange (mm)		150	
Width (mm)		750	
Reduce to:		600	
R (mm)		300	
kg/u		5,170	
u		1	
Material		Steel with surface coating	
Impact Strength (J)		20 J	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic