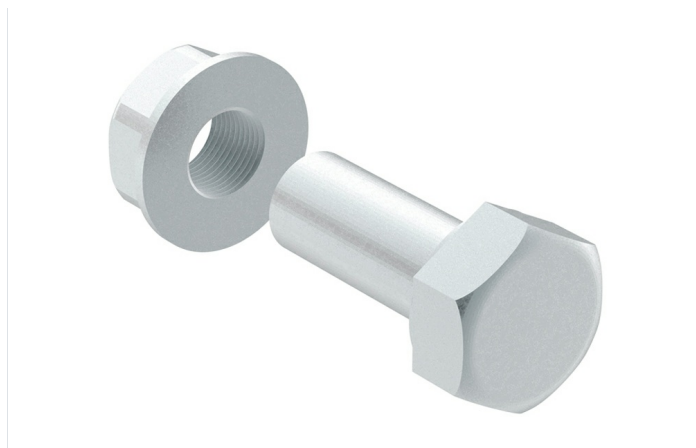


Description

Coupling kit for connecting trays and accessories, consisting of M8x20 hexagonal head bolt and M8 metal nut for Megaband® ladder installations, maintaining electrical continuity according to IEC 61537. M 8, M 8, With GC protection system. Suitable for all ladder sizes. Made of steel, and available in various Protection Systems.

Advantages

Suitable for all sizes of cable tray.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Electrical continuity guaranteed according to standard IEC61537.

It allows the connection of Megaband® ladder lengths and the fixing of joints for cut sections.

Very versatile piece for use in any joint along with a M8 hexagonal nut.

Applications

Suitable for the fixing of joints, supports and channel structures for installations of Megaband® ladder in the management of electrical cables and / or telecommunications in public buildings, infrastructures and civil works, industrial facilities, tertiary sector.

Solutions



Product data			
ETIM 10		EC003861	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Protection System		GC	
Finish		Zinc Nickel	
Resistance Class		Class 8	
M/PG		M 8	
G (mm)		20	
		kg/u	0,018
		u	100
		Material	Steel with surface coating
		Working temperature range (°C)	-50 / 150 °C
		Fire resistance	A1 No combustible

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Product applications

□ □ □ □ □ □ □ □

