


## Hexagonal Set Screw M8x20

1/2

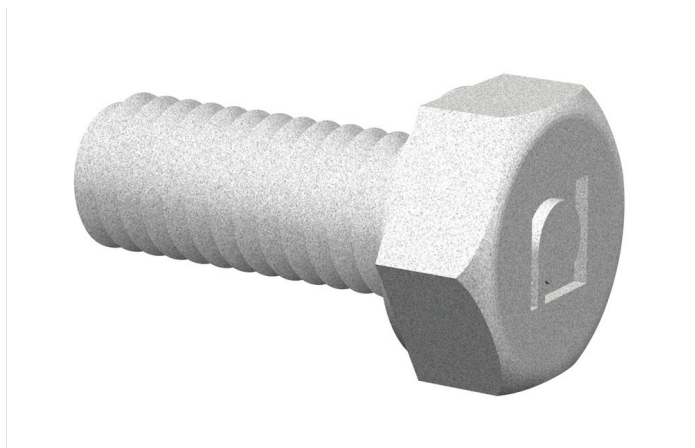

### Description

Metal bolt with hexagonal head for fixing joints, supports and channel structures for Megaband® Marine ladder installations. Available in M8.

### Advantages

Excellent corrosion resistance and mechanical properties

The serrated edge reinforces the tightening of the nut on the bolt.

CE certified in compliance with the low voltage directive 2014/35 / EU

SAFECu Protection system, copper-plated treatment, which confers hygienic properties by eliminating bacteria, viruses and fungi

### Applications

Suitable for installation in small spaces. Routing, Protection and Distribution of cables in electrical installations in the Naval Industry, Ships, Offshore Platforms, Port and Maritime applications.

### Solutions



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# Hexagonal Set Screw M8x20

## Main technical characteristics

ETIM 10  
EC003861

## Product data

| ⑤    | CEC<br>61537 | ⚙   | ⚙  | Ref      | kg/u  | 📦   | Ⓜ                          | 🔧            | ☒                 |
|------|--------------|-----|----|----------|-------|-----|----------------------------|--------------|-------------------|
| INOX | Class 9D     | M 8 | 20 | 67060065 | 0,014 | 100 | Acero inoxidable AISI 316L | -50 / 150 °C | A1 No combustible |

## ⑤ Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Ⓜ Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."