
Megaband Marine

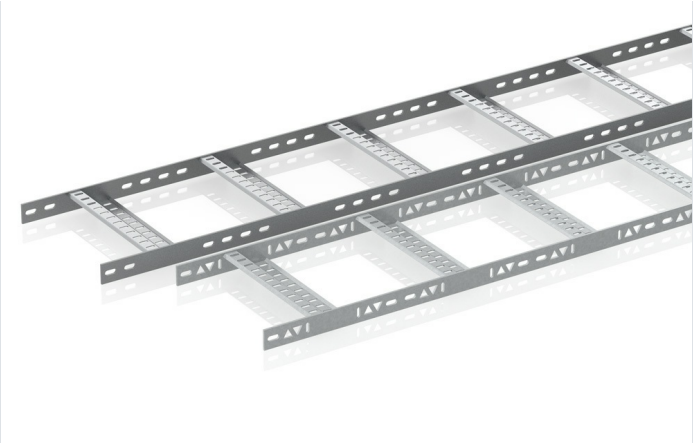

Description

Megaband® Marine ladder for installation in ships, naval and offshore environments. The Megaband Marine Tray It is configured with 4mm thick side rails and Z-format rungs with multi-perforations. Made from steel, available in various protection systems.

Advantages

Flange height 150 mm and available in widths of 200, 400, 450, 500 and 600 mm with a wide range of accessories.

Z-shaped and symmetrical crossbars, allowing the tray to be installed in any position. They also have multiple holes that facilitate the fixing of cables.

The side rail of the Megaband® Marine in GC Protection system has triangular perforations that allow cutting and bending these side rails to perform inside and outside risers. Additionally, they also allow us to manipulate the side rail transversely to create bends of different angles to 90º on the same plane, making changes of direction to overcome obstacles in the layout of the installation.

CE certified in compliance with the low voltage directive 2014/35 / EU

SAFECu Protection system, copper-plated treatment, which confers hygienic properties by eliminating bacteria, viruses and fungi

Applications

Suitable for installation in small spaces. Routing, Protection and Distribution of cables in electrical installations in the Naval Industry, Ships, Offshore Platforms, Ports and Maritime applications.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Megaband Marine

Main technical characteristics

40 | 100, 200, 300, 400, 500, 600 | 2 | 2 | 20 J | $e_{(mm)}$ 4 | mm^2 1 | -50 / 150 °C

A1 No combustible | ETIM 10 EC000854

Product data

Ⓢ	Class IEC 61537		REF	kg/u	Ⓜ
GC	Class 8	100	82003116	2,730	Steel with surface coating
GC	Class 8	200	82003117	3,200	Steel with surface coating
GC	Class 8	300	82003118	3,670	Steel with surface coating
GC	Class 8	400	82003119	4,140	Steel with surface coating
GC	Class 8	500	82003120	4,610	Steel with surface coating
GC	Class 8	600	82003121	5,080	Steel with surface coating
INOX	Class 9D	100	82003122	2,710	Acero inoxidable AISI 316L
INOX	Class 9D	200	82003123	3,130	Acero inoxidable AISI 316L
INOX	Class 9D	300	82003124	3,560	Acero inoxidable AISI 316L
INOX	Class 9D	400	82003125	3,980	Acero inoxidable AISI 316L
INOX	Class 9D	500	82003126	4,400	Acero inoxidable AISI 316L
INOX	Class 9D	600	82003127	4,830	Acero inoxidable AISI 316L

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber


PET - Thermoplastic Polyester

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."


TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product applications

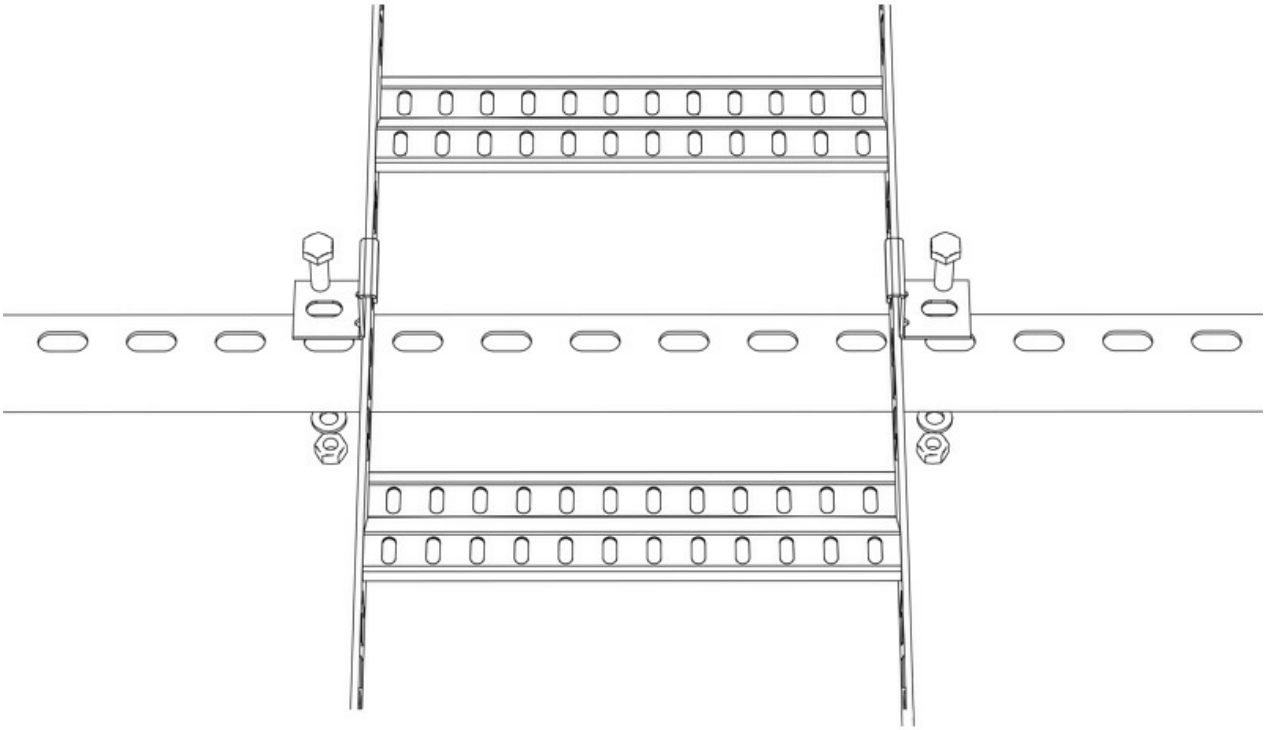

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

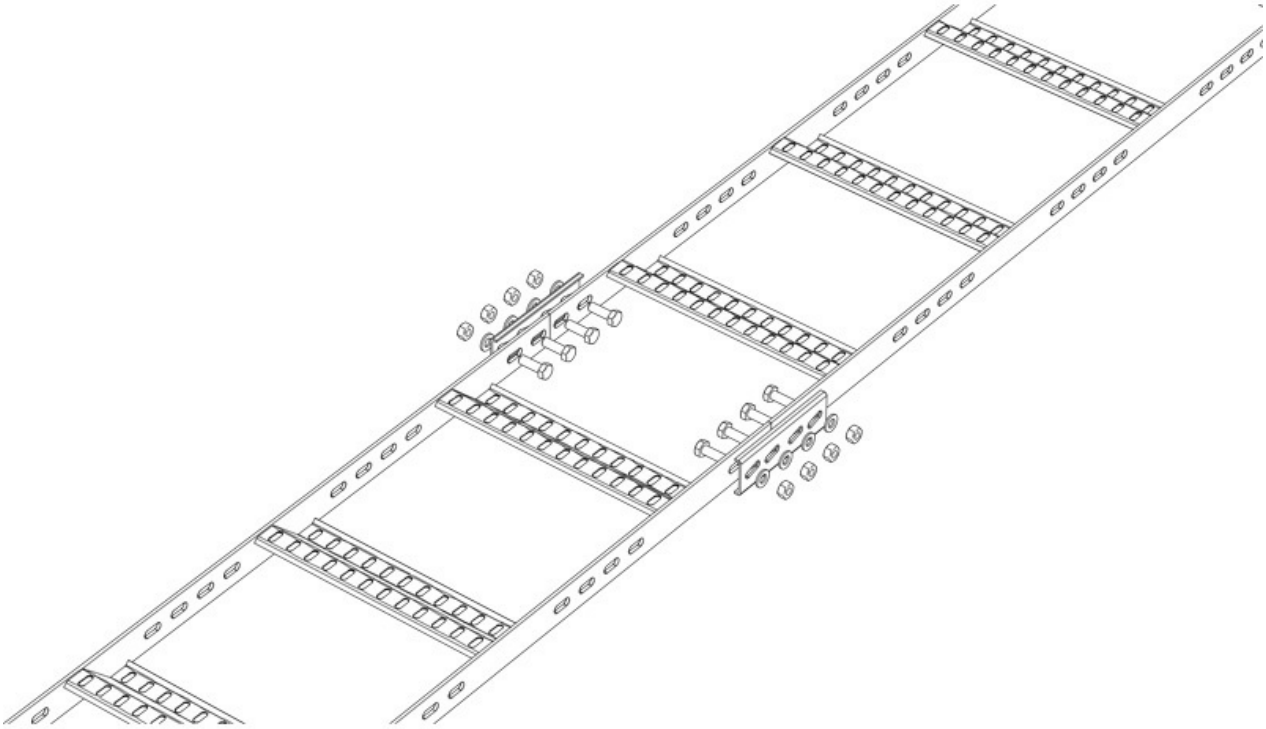

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."