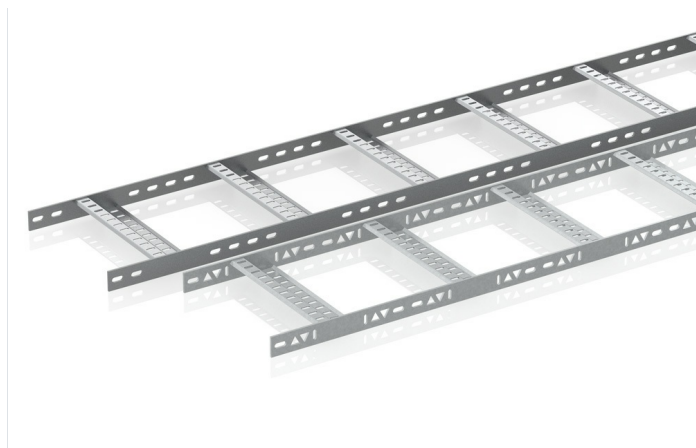


Description

Megaband® Marine ladder for installation in ships, naval and offshore environments. The Megaband Marine Tray. Of 40 mm height, Width 500 mm, With GC protection system, HDG finish. It is configured with 4mm thick side rails and Z-format rungs with multi-perforations. Made from steel, available in various protection systems.

Advantages

Flange height 150 mm and available in widths of 200, 400, 450, 500 and 600 mm with a wide range of accessories.

CE certified in compliance with the low voltage directive 2014/35 / EU

The side rail of the Megaband® Marine in GC Protection system has triangular perforations that allow cutting and bending these side rails to perform inside and outside risers. Additionally, they also allow us to manipulate the side rail transversely to create bends of different angles to 90° on the same plane, making changes of direction to overcome obstacles in the layout of the installation.

SAFECu Protection system, copper-plated treatment, which confers hygienic properties by eliminating bacteria, viruses and fungi

Z-shaped and symmetrical crossbars, allowing the tray to be installed in any position. They also have multiple holes that facilitate the fixing of cables.

Applications

Suitable for installation in small spaces. Routing, Protection and Distribution of cables in electrical installations in the Naval Industry, Ships, Offshore Platforms, Port: and Maritime applications.

Solutions



Product data			
ETIM 10		EC000854	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		23,88	
Protection System		GC	
Finish		HDG, Hot Dip Galvanised	
Resistance Class		Class 8	
Flange (mm)		40	
Width (mm)		500	
Length (m)		2	
kg/u		4,610	
u		2	
Material		Steel with surface coating	
Impact Strength (J)		20 J	
Thickness (mm)		4	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Product applications

□ □



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

