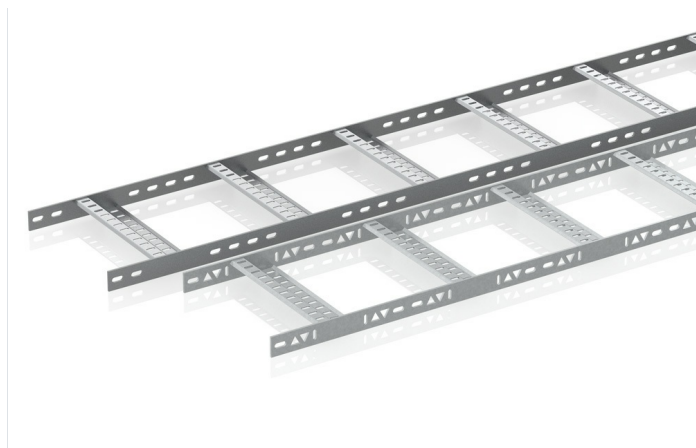


Description

Megaband® Marine ladder for installation in ships, naval and offshore environments. The Megaband Marine Tray. Of 40 mm height, Width 300 mm, With INOX protection system, I316L finish. It is configured with 4mm thick side rails and Z-format rungs with multi-perforations. Made from steel, available in various protection systems.

Advantages

Flange height 150 mm and available in widths of 200, 400, 450, 500 and 600 mm with a wide range of accessories.

CE certified in compliance with the low voltage directive 2014/35 / EU

The side rail of the Megaband® Marine in GC Protection system has triangular perforations that allow cutting and bending these side rails to perform inside and outside risers. Additionally, they also allow us to manipulate the side rail transversely to create bends of different angles to 90° on the same plane, making changes of direction to overcome obstacles in the layout of the installation.

SAFECu Protection system, copper-plated treatment, which confers hygienic properties by eliminating bacteria, viruses and fungi

Z-shaped and symmetrical crossbars, allowing the tray to be installed in any position. They also have multiple holes that facilitate the fixing of cables.

Applications

Suitable for installation in small spaces. Routing, Protection and Distribution of cables in electrical installations in the Naval Industry, Ships, Offshore Platforms, Port: and Maritime applications.

Solutions



ETIM 10	EC000854	u	2
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	37,807	Material	Acero inoxidable AISI 316L
Protection System	INOX	Impact Strength (J)	20 J
Finish	Stainless Steel AISI 316L	Thickness (mm)	4
Resistance Class	Class 9D	Working temperature range (°C)	-50 / 150 °C
Flange (mm)	40	Fire resistance	A1 No combustible
Width (mm)	300		
Length (m)	2		
kg/u	3,560		

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Reijband, Pemsaband, Inducanal, Reijtech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product applications

□ □



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

