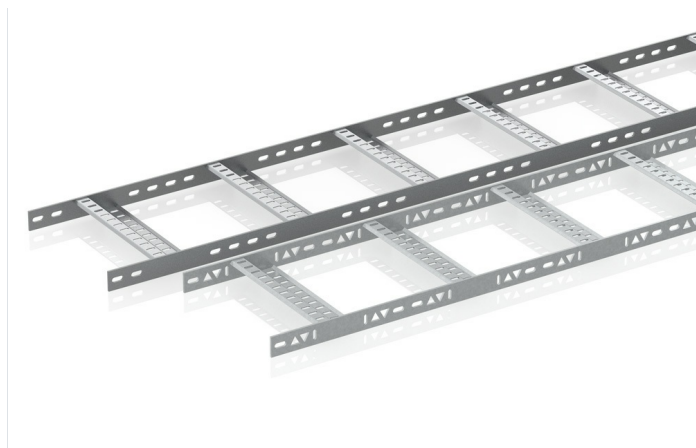


### Description

Megaband® Marine ladder for installation in ships, naval and offshore environments. The Megaband Marine Tray. Of 40 mm height, Width 500 mm, With INOX protection system, I316L finish. It is configured with 4mm thick side rails and Z-format rungs with multi-perforations. Made from steel, available in various protection systems.

### Advantages

Flange height 150 mm and available in widths of 200, 400, 450, 500 and 600 mm with a wide range of accessories.

CE certified in compliance with the low voltage directive 2014/35 / EU

The side rail of the Megaband® Marine in GC Protection system has triangular perforations that allow cutting and bending these side rails to perform inside and outside risers. Additionally, they also allow us to manipulate the side rail transversely to create bends of different angles to 90° on the same plane, making changes of direction to overcome obstacles in the layout of the installation.

SAFECu Protection system, copper-plated treatment, which confers hygienic properties by eliminating bacteria, viruses and fungi

Z-shaped and symmetrical crossbars, allowing the tray to be installed in any position. They also have multiple holes that facilitate the fixing of cables.

### Applications

Suitable for installation in small spaces. Routing, Protection and Distribution of cables in electrical installations in the Naval Industry, Ships, Offshore Platforms, Port: and Maritime applications.

### Solutions



|                                       |                           |
|---------------------------------------|---------------------------|
| ETIM 10                               | EC000854                  |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) | 46,728                    |
| Protection System                     | INOX                      |
| Finish                                | Stainless Steel AISI 316L |
| Resistance Class                      | Class 9D                  |
| Flange (mm)                           | 40                        |
| Width (mm)                            | 500                       |
| Length (m)                            | 2                         |
| kg/u                                  | 4,400                     |

|                                |                            |
|--------------------------------|----------------------------|
| u                              | 2                          |
| Material                       | Acero inoxidable AISI 316L |
| Impact Strength (J)            | 20 J                       |
| Thickness (mm)                 | 4                          |
| Working temperature range (°C) | -50 / 150 °C               |
| Fire resistance                | A1 No combustible          |

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

### BK8 - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Reijband, Pemsaband, Inducanal, Reijtech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product applications

□ □



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

