
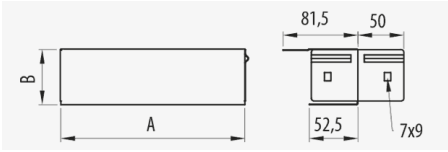


Reducer PEMSAband (Ref: 71025060)

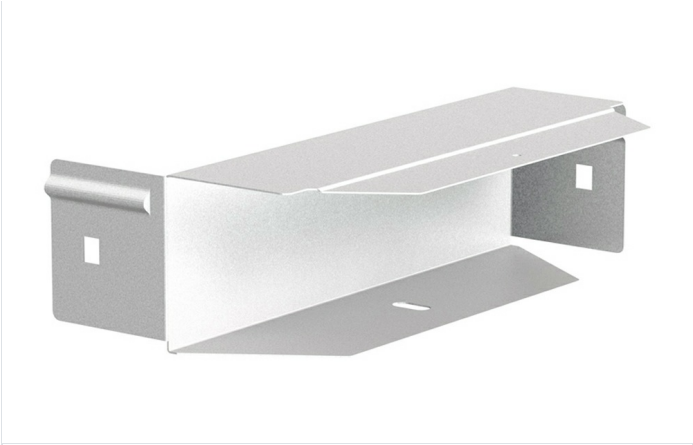

Description

Of 120 mm height, Width 600 mm, With PG protection system, PG3 finish

Advantages

Applications

Solutions



Protection System	PG	u	1
Finish	PG3, Pregalvanised	Material	Steel with surface coating
Resistance Class	Class 3	IP	IP44
Flange (mm)	120	Working temperature range (°C)	-50 / 150 °C
Width (mm)	600	Fire resistance	A1 No combustible
kg/u	0.845		

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



Product applications

□ □ □ □ □ □