
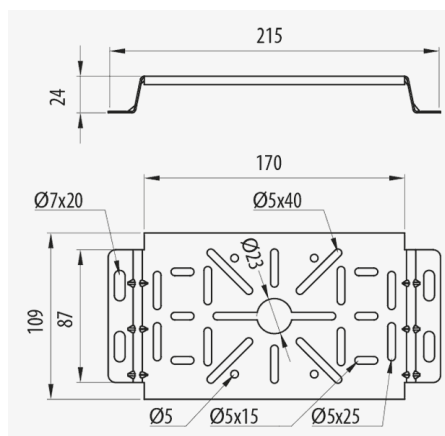


Universal Bracket (Ref: 70430911)

1/8

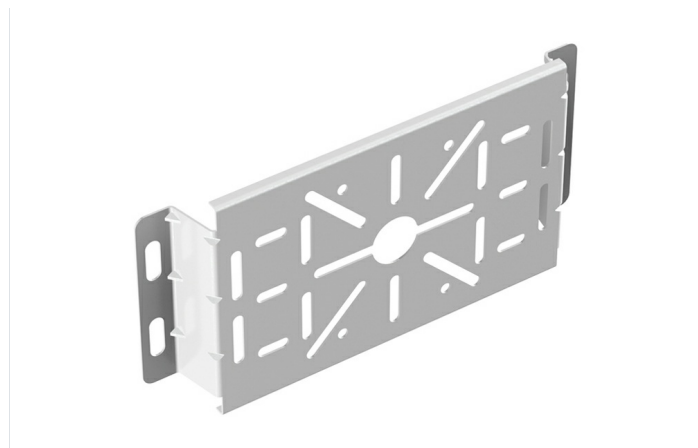

Description

Metal support for the installation of boxes, luminaires or other devices to the Pemsaband® and Inducanal® tray. With GC protection system. It also allows for the wall support of light loads in Pemsaband® and Inducanal® trays of widths 60, 100 and 150. Manufactured in steel and available in various Protection Systems.

Advantages

Available in protection systems: PG, pre-galvanized and GC, hot-dip galvanized

Thanks to its design it allows the placing of accessories in various positions.

For mounting on tray use the Pemsaband M6 Connection Kit.

Allows wall mounting of all types of trays of intermediate widths and not very high loads.

Quick and easy installation.

Applications

Suitable for the installation of boxes or other devices on the Pemsaband® and Inducanal® trays and for the support of light loads on the wall, in the Support, management and distribution of Electrical and/or telecommunications cables in public buildings, infrastructures and civil works, tertiary sector and industrial applications. Compatible with the range of Megaband® ladder for use as a device holder.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data

ETIM 10	EC001004	u	10
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	0,507	Material	Steel with surface coating
Protection System	GC	Working temperature range (°C)	-50 / 150 °C
Finish	Zinc Nickel	Fire resistance	A1 No combustible
Resistance Class	Class 8		
kg/u	0,196		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product applications

