


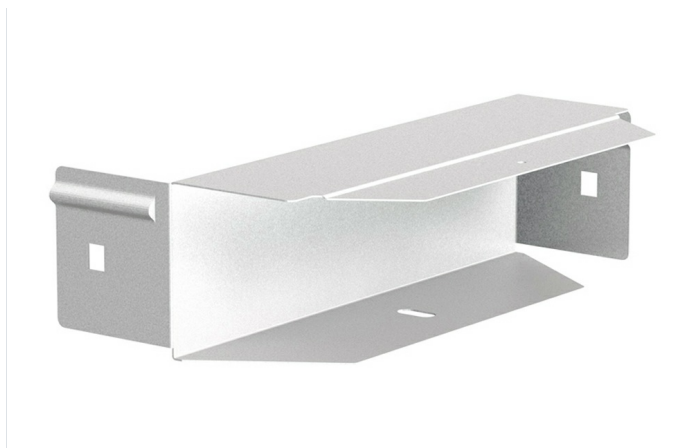

Description

Of 120 mm height, Width 200 mm, With PG protection system, PG3 finish

Advantages

Applications

Solutions



Product data			
ETIM 10	EC001574	u	1
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	1,164	Material	Steel with surface coating
Protection System	PG	IP	IP44
Finish	PG3, Pregalvanised	Working temperature range (°C)	-50 / 150 °C
Resistance Class	Class 3	Fire resistance	A1 No combustible
Flange (mm)	120		
Width (mm)	200		
kg/u	0,360		

Protection System

CU

- Copper electroplated

PG

- Pregalvanised

EZ

- Electrogalvanised

BC

- Electrogalvanised Bichromate

BK8

- High Resistance Coating

GC

- Hot Dip Galvanising

INOX

- Stainless Steel

PT

- Polyester Paint

AL

- Aluminum

LN

- Brass or Nickel-plated brass

Insulating materials

PC+ABS

- Halogen Free Polycarbonate + ABS

PVC

- Polyvinyl Chloride

PP

- Halogen Free Polypropylene

PA6

- Halogen Free Polyamide 6

PA12

- Halogen Free Polyamide 12

PU

- Polyurethane

PE

- Polyethylene

NBR

- NBR rubber

PET

- Thermoplastic Polyester

TPV

- Thermoplastic

Product applications

□ □ □ □ □ □