
Ladder tray Coupler

# Hexagonal Set Screw ( Ref: 67060065 )



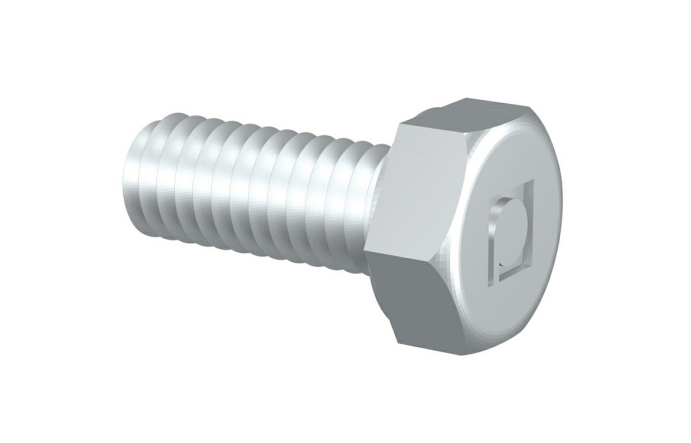

## Description

Metal bolt with hexagonal head for fixing joints, supports and channel structures for tray installations. M 8, M 8, With INOX protection system, I316L finish. Available in M8x15, M8x20, M8x35, M8x65, M10x20, M10x35 and M10x60. Made of steel and various Protection Systems.

## Advantages

CE conformity to directive 2014/35 / EU.

Available in various sizes: M6, M8 and M10 and lengths, 15, 20, 35 and 60 mm according to the protection systems.

Available in several protection systems: EZ, GC and AISI316L stainless steel.

## Applications

Suitable for the fixing of joints, supports and channel structures in tray installations for the management of electrical cables and / or telecommunications in public buildings, infrastructures and civil works, industrial facilities and the tertiary sector.

## Solutions



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# Hexagonal Set Screw ( Ref: 67060065 )

## Product data

| | | | |
|---|---|---|---|
| **ETIM 10** | EC003861 | **kg/u** | 0,014 |
| **Huella de CO2. GWP A1-A3 (kg CO2 eq.)** | | **u** | 100 |
| **Protection System** | INOX | **Material** | Acero inoxidable AISI 316L |
| **Finish** | Stainless Steel AISI 316L | **Working temperature range (°C)** | -50 / 150 ºC |
| **Resistance Class** | Class 9D | **Fire resistance** | A1 No combustible |
| **M/PG** | M 8 | | |
| **G (mm)** | 20 | | |

## Ⓢ Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Ⓜ Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."