


## Hexagonal Set Screw ( Ref: 67060065 )

1/2

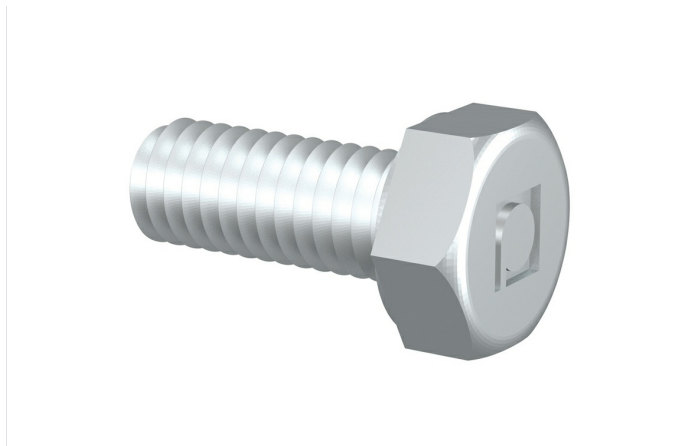

### Description

Metal bolt with hexagonal head for fixing joints, supports and channel structures for tray installations. M 8, M 8, With INOX protection system, I316L finish. Available in M8x15, M8x20, M8x35, M8x65, M10x20, M10x35 and M10x60. Made of steel and various Protection Systems.

### Advantages

CE conformity to directive 2014/35 / EU.

Available in various sizes: M6, M8 and M10 and lengths, 15, 20, 35 and 60 mm according to the protection systems.

Available in several protection systems: EZ, GC and AISI316L stainless steel.

### Applications

Suitable for the fixing of joints, supports and channel structures in tray installations for the management of electrical cables and / or telecommunications in public buildings, infrastructures and civil works, industrial facilities and the tertiary sector.

### Solutions



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



| Product data                          |  |                            |     |
|---------------------------------------|--|----------------------------|-----|
| ETIM 10                               |  | EC003861                   |     |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) |  | u                          | 100 |
| Protection System                     |  | INOX                       |     |
| Material                              |  | Acero inoxidable AISI 316L |     |
| Finish                                |  | Stainless Steel AISI 316L  |     |
| Working temperature range (°C)        |  | -50 / 150 °C               |     |
| Resistance Class                      |  | Class 9D                   |     |
| Fire resistance                       |  | A1 No combustible          |     |
| M/PG                                  |  | M 8                        |     |
| G (mm)                                |  | 20                         |     |

| Protection System                 |
|-----------------------------------|
| CU - Copper electroplated         |
| PG - Pregalvanised                |
| EZ - Electrogalvanised            |
| BC - Electrogalvanised Bichromate |
| BK8 - High Resistance Coating     |
| GC - Hot Dip Galvanising          |
| INOX - Stainless Steel            |
| PT - Polyester Paint              |
| AL - Aluminum                     |
| LN - Brass or Nickel-plated brass |

| Insulating materials                      |
|-------------------------------------------|
| PC+ABS - Halogen Free Polycarbonate + ABS |
| PVC - Polyvinyl Chloride                  |
| PP - Halogen Free Polypropylene           |
| PA6 - Halogen Free Polyamide 6            |
| PA12 - Halogen Free Polyamide 12          |
| PU - Polyurethane                         |
| PE - Polyethylene                         |
| NBR - NBR rubber                          |
| PET - Thermoplastic Polyester             |
| TPV - Thermoplastic                       |