
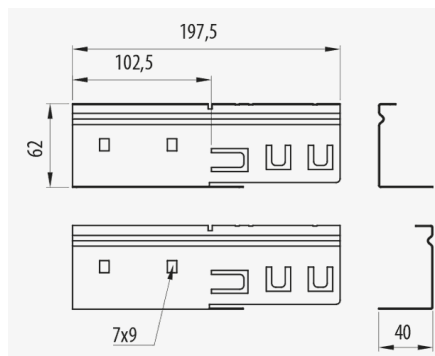


## Rejiband Pemsaband Coupler

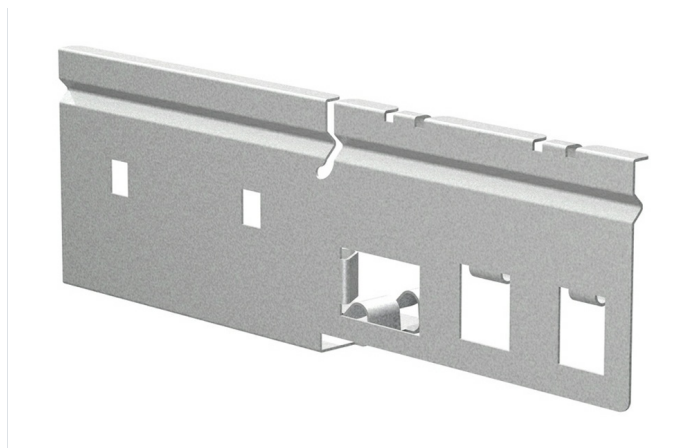

### Description

Assembly of different sections of Pemsaband® and Rejiband® trays. Metal joint pieces, in various protection systems, that allow the joining of different sections of Pemsaband® trays and Rejiband® wire mesh tray whilst maintaining the guarantee of electrical continuity, according to IEC 61537. It is mounted on the flange of both trays and is fixed by the Quick-connect Click system on the wire mesh tray and with nuts and bolts in the sheet metal tray.

### Advantages

It enables the joining of different types of wire mesh and sheet trays.

Complete view of the whole installation.

Prevents damage to the cables when making the joint.

Electrical continuity guaranteed according to standard IEC61537.

Available in protection systems: PG, pre-galvanized and GC, hot-dip galvanized

### Applications

Used in the management and distribution of cables in electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial installations and in the tertiary sector.

### Solutions



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# Rejiband Pemsaband Coupler

## Main technical characteristics

|                                                                                    |                                                                                                              |                                                                                                |                                                                                                     |                     |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|---------------------|
|  1 |  Steel with surface coating |  -50 / 150 °C |  A1 No combustible | ETIM 10<br>EC002413 |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|---------------------|

## Product data

|  |  <small>Class 3</small> |  <small>Ref</small> | <small>kg/u</small> |
|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|---------------------|
| PG                                                                                | Class 3                                                                                                  | 70120200                                                                                             | 0,195               |
| GC                                                                                | Class 5                                                                                                  | 70130200                                                                                             | 0,218               |

## Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



# Rejiband Pemsaband Coupler

## Product applications

