
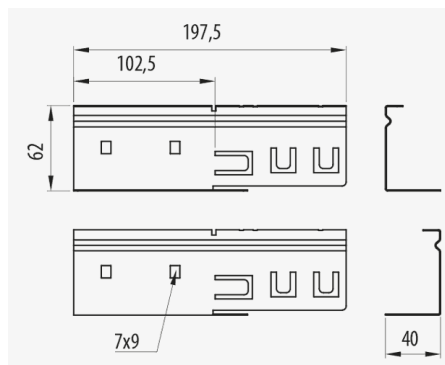


Rejiband Pemsaband Coupler (Ref: 70130200)

1/5

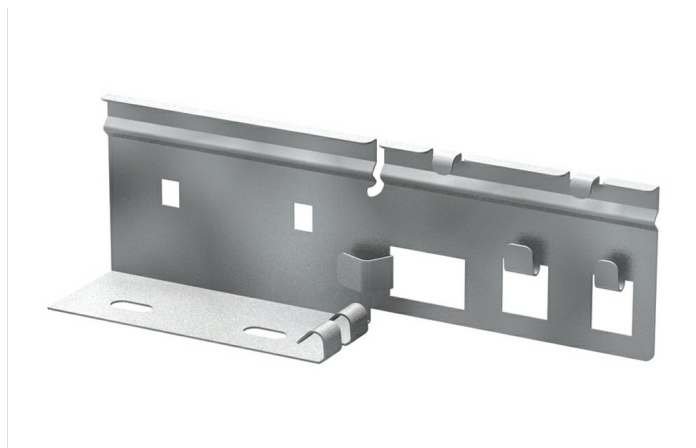

Description

Assembly of different sections of Pemsaband® and Rejiband® trays. With GC protection system. Metal joint pieces, in various Protection Systems, that allow the joining of different sections of Pemsaband® trays and Rejiband® wire mesh tray whilst maintaining the guarantee of electrical continuity, according to IEC 61537. It is mounted on the flange of both trays and is fixed by the Quick-connect Click system on the wire mesh tray and with nuts and bolts in the sheet metal tray.

Advantages

Available in PG and GC protection systems.

Prevents damage to the cables when making the joint.

It enables the joining of different types of wire mesh and sheet trays.

Electrical continuity guaranteed according to standard IEC61537.

Complete view of the whole installation.

Applications

Used in the management and distribution of cables in electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial installations and in the tertiary sector.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."




Product data			
Protection System	GC	u	1
Finish	HDG, Hot Dip Galvanised	Material	Steel with surface coating
Resistance Class	Class 5	Working temperature range (°C)	-50 / 150 °C
kg/u	0.218	Fire resistance	A1 No combustible


Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Product applications

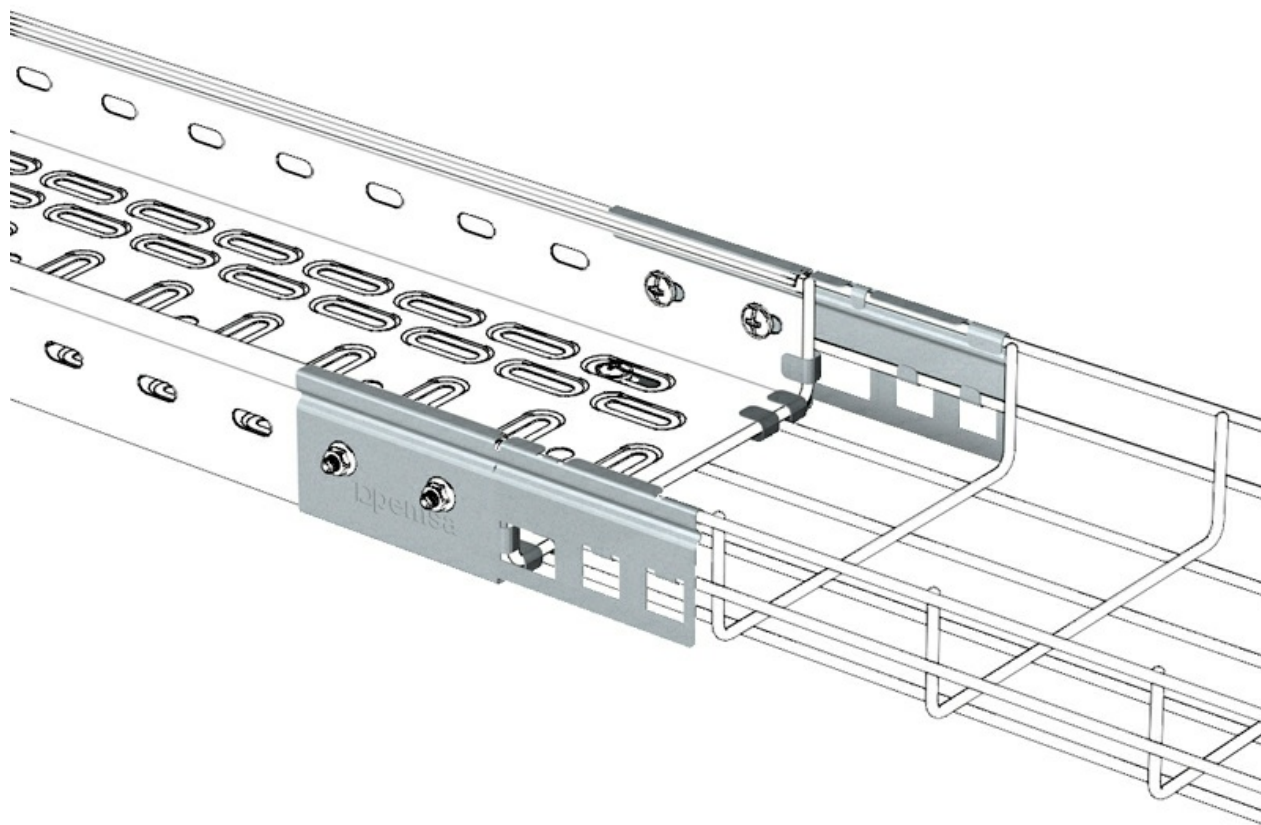

Rejiband Pemsaband Coupler (Ref: 70130200)

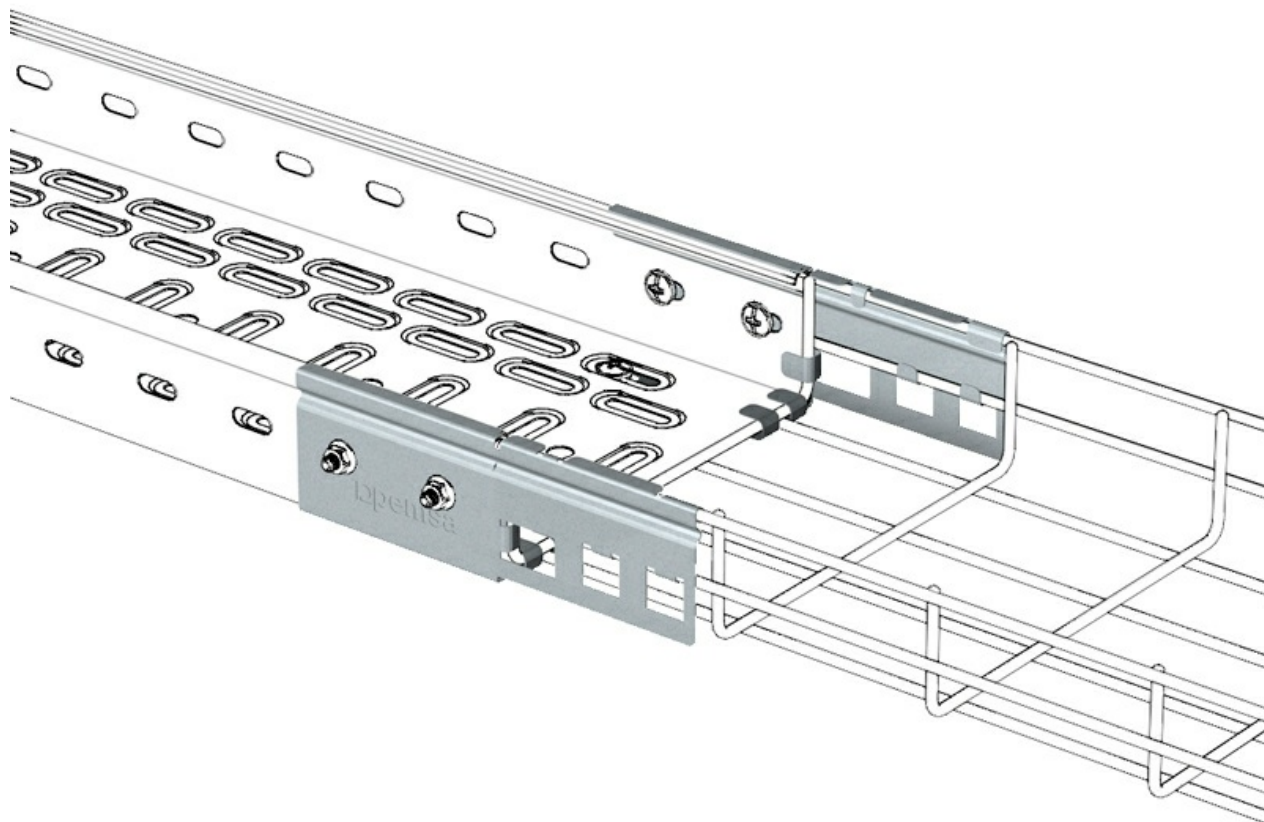

Rejiband Pemsaband Coupler (Ref: 70130200)

