
Megaband REP. Cable Ladder (Ref: 82002376)



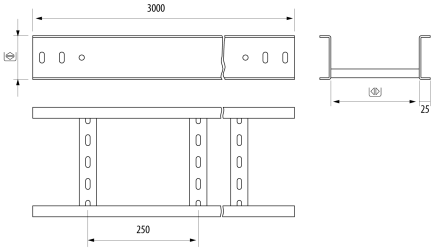

Description

Reinforced ladder for large elevated loads in heavy industry. Of 100 mm height, Width 400 mm. The Megaband® REP ladder is made up of alternating welded steel rungs 250mm high and a safety edge to protect and strengthen the ladder. Made from steel with GC Protection system.

Advantages

Wide variety of sizes and accessories to adapt to the demands of each electrical installation.

In accordance with the IEC 61537 and CE standard with respect to directive 2014/35 / EU.

Specially designed for the petrochemical sector, with REPSOL approvals, ED-P-11-02

4mm side rails and 3mm rungs thickness.

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

Applications

This ladder is especially suitable for electrical installations to support large loads in industrial, petrochemical, oil & gas, power plant, mining and cement plants.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Megaband REP. Cable Ladder (Ref: 82002376)

Product data

ETIM 10	EC000854	**u**	6
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		**Material**	Steel with surface coating
Protection System	GC	**Impact Strength (J)**	20 J
Finish	HDG, Hot Dip Galvanised	**Thickness (mm)**	4
Resistance Class	Class 8	**Section (mm2)**	30400
Flange (mm)	100	**Working temperature range (°C)**	-50 / 150 °C
Width (mm)	400	**Fire resistance**	A1 No combustible
Length (m)	6		
kg/u	11,700		

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Megaband REP. Cable Ladder (Ref: 82002376)

Product applications

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."