
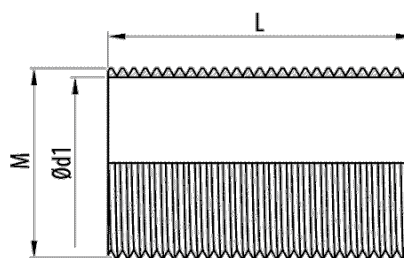


RE Coupler

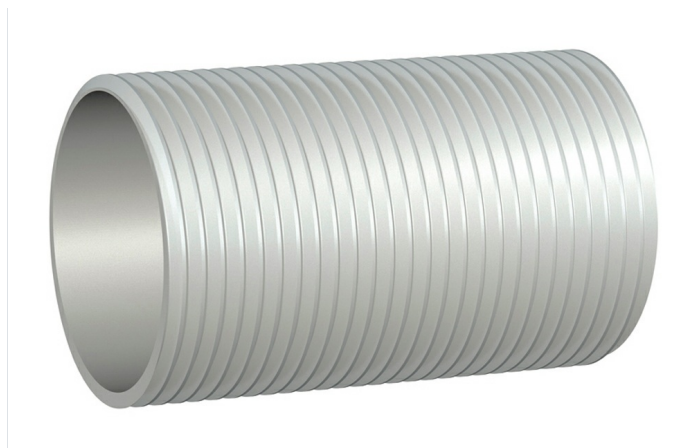

Description

External thread coupler of EZ Protection System steel, for the connection of RR and RL conduits in installations that require high mechanical performance and an average resistance to corrosion. Available in different diameters.

Advantages

Working temperature: -45°C to + 400°C.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Manufactured in PG protection system (standard EN-ISO 2081), suitable for indoor installations. Grade 2 corrosion resistance, according to IEC 61386. Medium indoor and outdoor protection.

Applications

Suitable for the connection of RL and RR metal rigid conduits in building, tertiary and industrial applications with high safety requirements. Premises of public attendance and premises with risk of fire or explosion.

Solutions



Main technical characteristics

 EZ	 DN NW16, NW20, NW25, NW32, NW40, NW50, NW63	 M16, M20, M25, M32, M40, M50, M63	 Steel with surface coating
 IP67	 -45 / 400 °C	 LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	ETIM 10 EC000939

Product data

DN				Ref	kg/u	
NW16	M16	13.6	30	55005016	0,022	50
NW20	M20	17.6	35	55005020	0,034	50
NW25	M25	22.6	40	55005025	0,050	50
NW32	M32	29.6	43	55005032	0,070	25
NW40	M40	37	43	55005040	0,095	20
NW50	M50	47	52	55005050	0,148	10
NW63	M63	60	63	55005063	0,237	6

 Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

