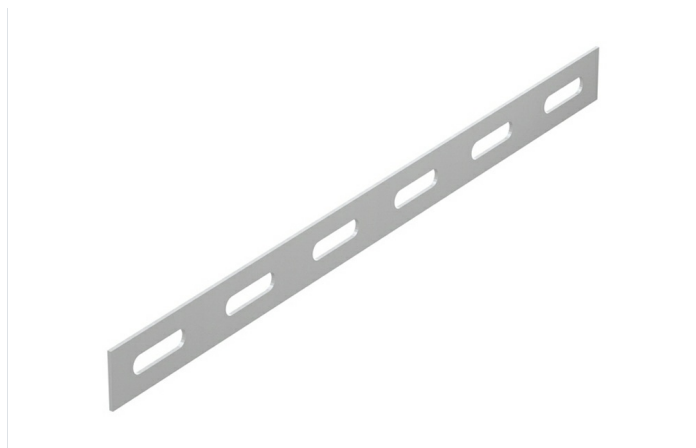


### Description

Multipurpose metal accessory used for the joining of straight sections, making bends or other accessories with the Rejiband wire mesh tray. With INOX protection system, I316L finish. It is fixed to the tray or accessories by screws, ensuring the mechanical strength of the joint and the electrical continuity, according to IEC61537 standard. Made of steel and available in various Protection Systems.

### Advantages

Available in different protection systems: EZ, BK8, GC, and stainless steel AISI 316.

Facilitates the creation of bends.

Electrical continuity guaranteed according to standard IEC61537.

Number of joints required depends on the width of the tray.

Simplification of the joint assembly between different sections.

### Applications

Used in the joining of straight sections of Rejiband tray for electrical and/or telecommunications installations in: Civil Works, Tunnels, Car Parks, Public Buildings, Shopping Centres, Major Infrastructures, Airports, Underground and Railway, Tertiary sector and industrial applications.

### Solutions



FOOD INDUSTRY



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



## Product data

|                                              |                           |                                       |                            |
|----------------------------------------------|---------------------------|---------------------------------------|----------------------------|
| <b>ETIM 10</b>                               | EC002413                  | <b>u</b>                              | 10                         |
| <b>Huella de CO2. GWP A1-A3 (kg CO2 eq.)</b> |                           | <b>Material</b>                       | Acero inoxidable AISI 316L |
| <b>Protection System</b>                     | INOX                      | <b>Working temperature range (°C)</b> | -50 / 150 °C               |
| <b>Finish</b>                                | Stainless Steel AISI 316L | <b>Fire resistance</b>                | A1 No combustible          |
| <b>Resistance Class</b>                      | Class 9D                  |                                       |                            |
| <b>kg/u</b>                                  | 0,065                     |                                       |                            |

## Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



## Product applications

