29/03/2024

1/5

Nemaband Z Profile







Description

Nemaband® ladder with Z profile and 41x21mm rungs in an alternating arrangement. Suitable for industrial installations and large spans where the load requirements are very high or where the design of the installation requires a greater distance between supports. Made from steel with GC Protection system.

Advantages

The 41x21 rungs are mounted alternately up and down to allow the fixing of the cables.

6 m long sections suitable for installations with large spans or distances between supports.

Tested with respect to the requirements and characteristics of the product standard IEC 61537 and CE Certificate in compliance with the low voltage directive 2014/35 / EU.

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

20C load capacity classification according to NEMA VE1 Standard with safety factor 1.5. Please consult sizes.

Applications

Solutions

www.pemsa-rejiband.com















29/03/2024

2/5

Nemaband Z Profile

Main technical characteristics

S GC Class EC Class 8 🗎 100, 150

150, 300, 450, 600, 750, 900 **ETIM**

👤 20 J



| _ | | | | |
|-----|----|-----|---|-----|
| Pro | dι | ıct | d | ata |

| | | Ref | kg/u | mm ² |
|-----|-----|----------|--------|-----------------|
| 100 | 150 | 82002723 | 6.760 | 9750 |
| 100 | 300 | 82002724 | 7.550 | 19500 |
| 100 | 450 | 82002725 | 8.340 | 29250 |
| 100 | 600 | 82002726 | 9.130 | 39000 |
| 100 | 750 | 82002727 | 9.920 | 48750 |
| 100 | 900 | 82002728 | 10.700 | 58500 |
| 150 | 150 | 82002729 | 8.540 | 17250 |
| 150 | 300 | 82002730 | 9.330 | 34500 |
| 150 | 450 | 82002731 | 10.100 | 51750 |
| 150 | 600 | 82002732 | 10.900 | 69000 |
| 150 | 750 | 82002733 | 11.700 | 86250 |
| 150 | 900 | 82002734 | 12.500 | 103500 |

S Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

® Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester















Nemaband Z Profile

29/03/2024

3/5

TPV - Thermoplastic














Nemaband Z Profile

29/03/2024

Product applications

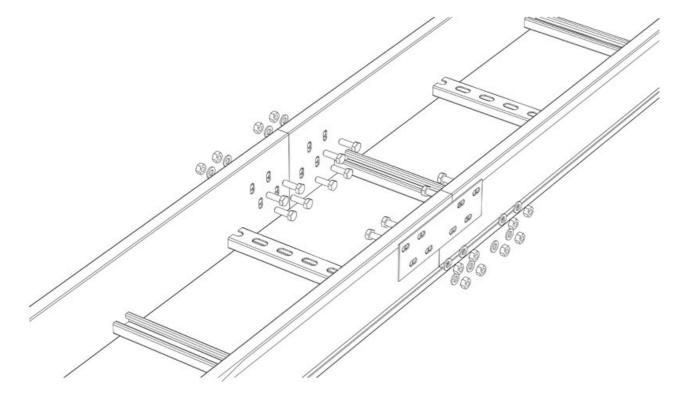











29/03/2024

