
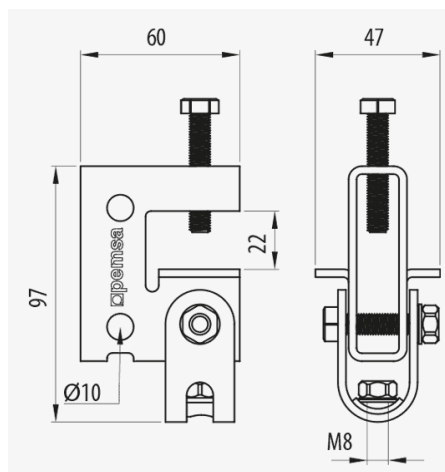


## Beam Clamp Hanging Assembly ( Ref:

1/3

67030048 )

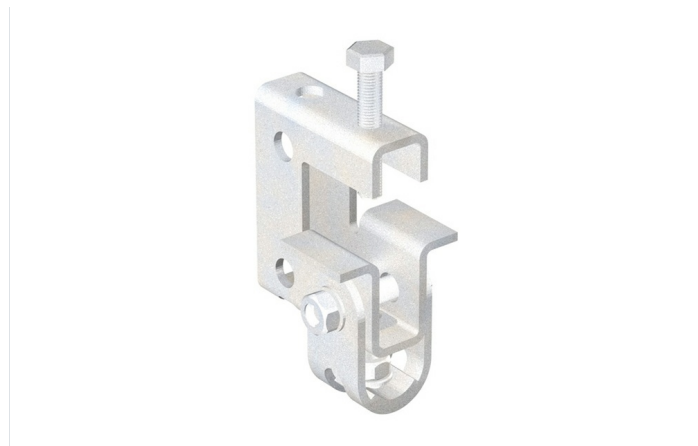

### Description

Metal clamp for beam mounting with different positions and angles for Rejiband® wire mesh trays and Pemsaband® sheet trays. With GC protection system. Made of steel and various Protection Systems.

### Advantages

CE conformity to directive 2014/35 / EU.

Connection in different positions allowing for the vertical adjustment according to the angle or inclination of the beam.

Available in PG and GC protection system.

Installation of ceiling mounts on a beam.

Its load capacity depends on the position and the angle at which it is placed.

### Applications

Suitable for the installation of ceiling mounts from beams for Rejiband® and Pemsaband® trays for the conduction of electrical and telecommunications wiring in public buildings, infrastructures and civil works, industrial facilities and the tertiary sector.

### Solutions



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



| Product data                          |  |                            |  |
|---------------------------------------|--|----------------------------|--|
| ETIM 10                               |  | EC010150                   |  |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) |  |                            |  |
| Protection System                     |  | GC                         |  |
| Finish                                |  | ZL, Zinc Lamellar          |  |
| Resistance Class                      |  | Class 8                    |  |
| kg/u                                  |  | 0,309                      |  |
| u                                     |  | 1                          |  |
| Material                              |  | Steel with surface coating |  |
| Working temperature range (°C)        |  | -50 / 150 °C               |  |
| Fire resistance                       |  | A1 No combustible          |  |

Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester


**TPV** - Thermoplastic

# Beam Clamp Hanging Assembly ( Ref:

3/3

67030048 )

## Product applications

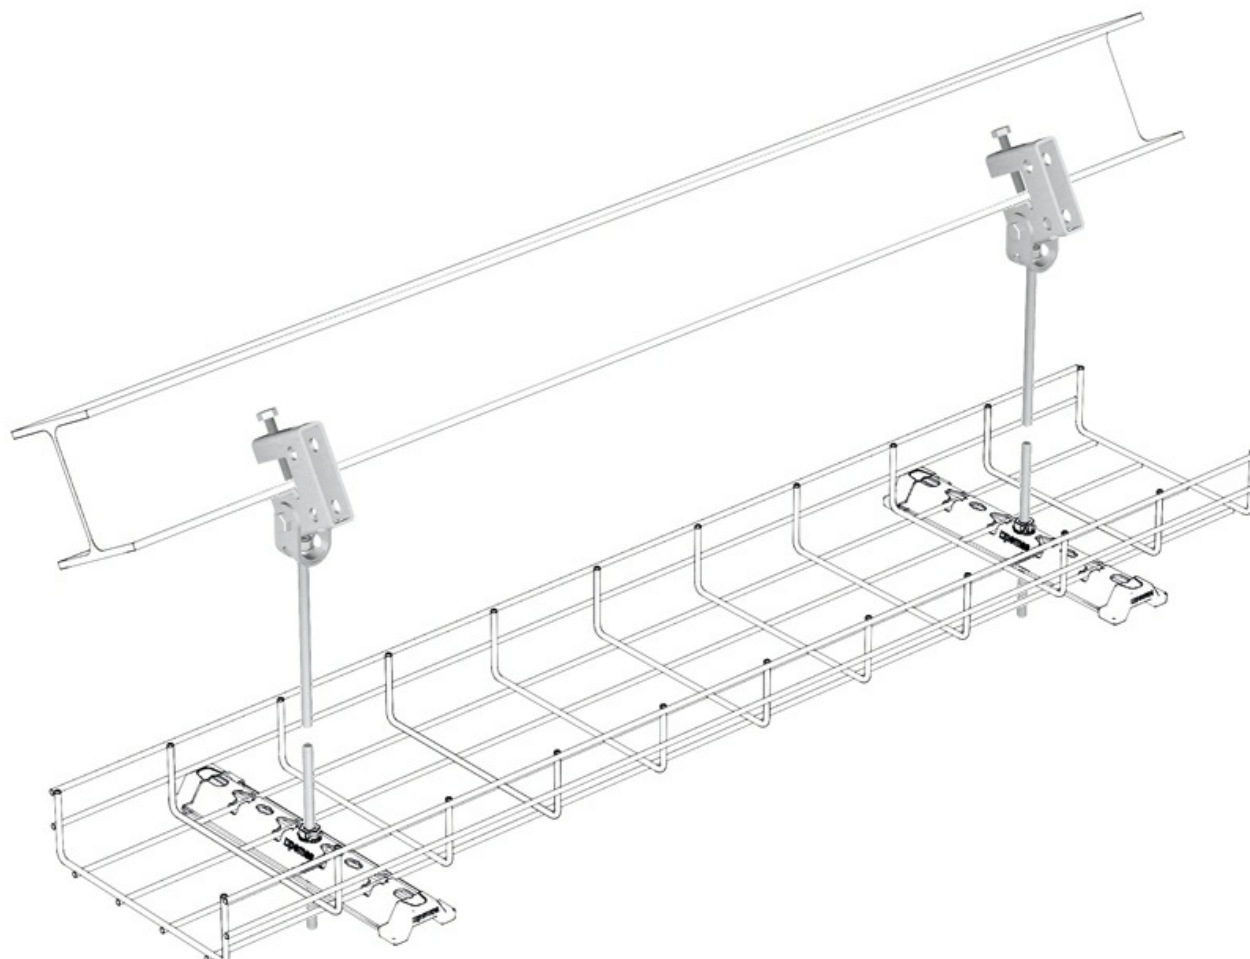

[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."