


Pendant Omega SPLUS (Ref: 62081504)

1/8

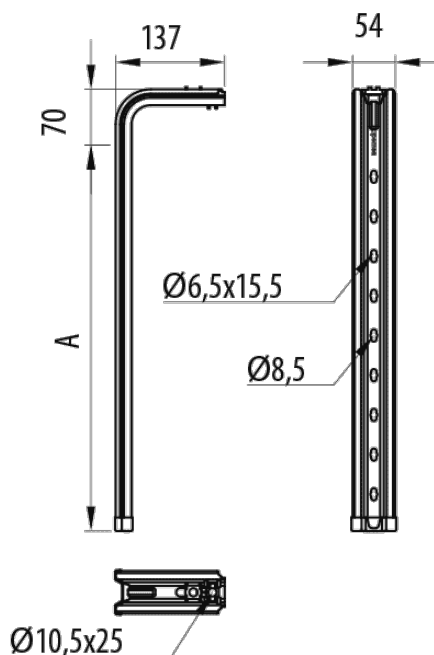

Description

Omega profile pendulum with safety plugs for the ceiling mounting of Rejiband® trays with click system and Pemsaband® trays with fixings. Width 500 mm, With BK8 protection system, BLACK C8 finish. Ceiling fixing system that allows you to configure different structures individually or with the help of omega SPLUS supports. Available in lengths of 300, 400, 500 and 600 mm. Made of steel in various Protection Systems.

Advantages

Available in several protection systems: PG, GC, BK8 and stainless steel AISI 304 and AISI 316L.

It includes plugs and protectors for ease of installation and to protect the installer.

N Mark of Aenor, in accordance with IEC 61537 and CE conformity to Directive 2014/35 / EU. Fire resistance E90 according to DIN 4102-12.

Reinforced omega profile. Increases the performance of the support.

Multipurpose system of fixing to the ceiling that allows various configurations for constructing structures individually or with the use of omega SPLUS supports.

Applications

Suitable for supporting medium loads of cable trays to the ceiling for electrical installations and / or of telecommunications in: Civil works, tunnels, car parks, public buildings, commercial centres, large infrastructures such as: Airports, underground, rail, tertiary sector, industrial naval, petrochemical, textile, chemical and food applications, according to the finish.

Solutions



RENEWABLE ENERGIES DATA CENTERS SERVICE AND RETAIL FIRE RESISTANCE SOLUTION



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data

ETIM 10	EC000022	Material	Steel with surface coating
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	1,929	F (kg)	300
Protection System	BK8	Mf1 (Kg·m)	8
Finish	BLACK C8	Mf2 (Kg·m)	7
Resistance Class	Class 8	Working temperature range (°C)	-50 / 150 °C
Width (mm)	500	Fire resistance	E90 (90 min. 1000°C)
kg/u	0,766		
u	5		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic




www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Load diagrams

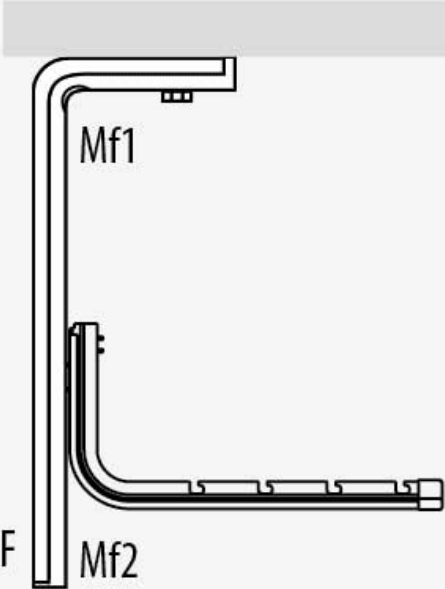CTA (kg)		F kg	Mf1 kg.m	Mf2 kg.m
	PG			
	300	200	9	7
	400	200	7	6
	500	300	8	7
	600	350	10	9
	GC			
	300	165	8	6
	400	180	7	6
	500	270	11	10
	600	280	11	10

Product applications

