
Rejiband Joints

Side Joint Plate





Description

Metal side joining piece in various Protection Systems for the assembly of different sections of Rejiband trays. Excellent adjustment with maximum load values, ensuring mechanical strength of the joint and electrical continuity, according to IEC61537 standard. For the installation of trays, the connecting plate is installed on the side of the tray and connected by means of the Rejiband Part Clamp. It is an accessory for the assembly of Rejiband trays, made of steel and available in different Protection Systems.

Advantages

Side connection for Rejiband®trays.

Suitable for trays 60 to 600 mm wide.

Reinforces the joint between different sections of the tray with the use of the Rejiband®fixing.

Available in various protection systems: EZ, BC, GC, high resistance BK C8 and passivated stainless steel AISI 316.

Applications

Suitable for the joining of straight sections of Rejiband®tray in all types of wall or ceiling mounted electrical installations.

Solutions

FOOD INDUSTRY

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Side Joint Plate

Main technical characteristics

50 | -50 / 150 °C | A1 No combustible | ETIM 10 EC002413

Product data

Ⓢ	Class IEC 61537	REF	kg/u	Ⓜ
EZ	Class 3	64010041	0,051	Steel with surface coating
GC	Class 8	64030041	0,052	Steel with surface coating
INOX	Class 9D	64060041	0,050	Acero inoxidable AISI 316L
BK8	Class 8	64080041	0,051	Steel with surface coating

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber


PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."


Side Joint Plate

Product applications

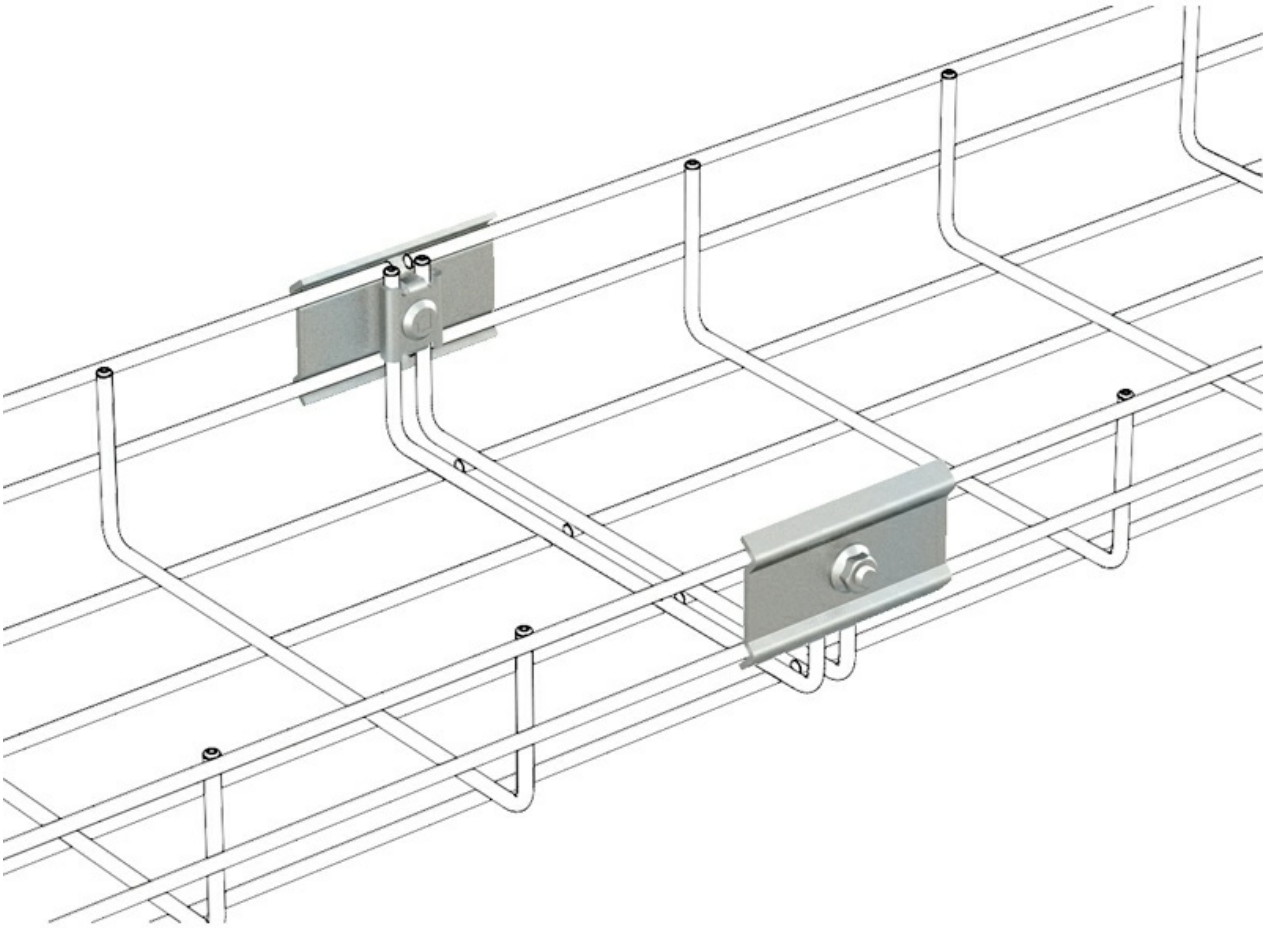

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Side Joint Plate

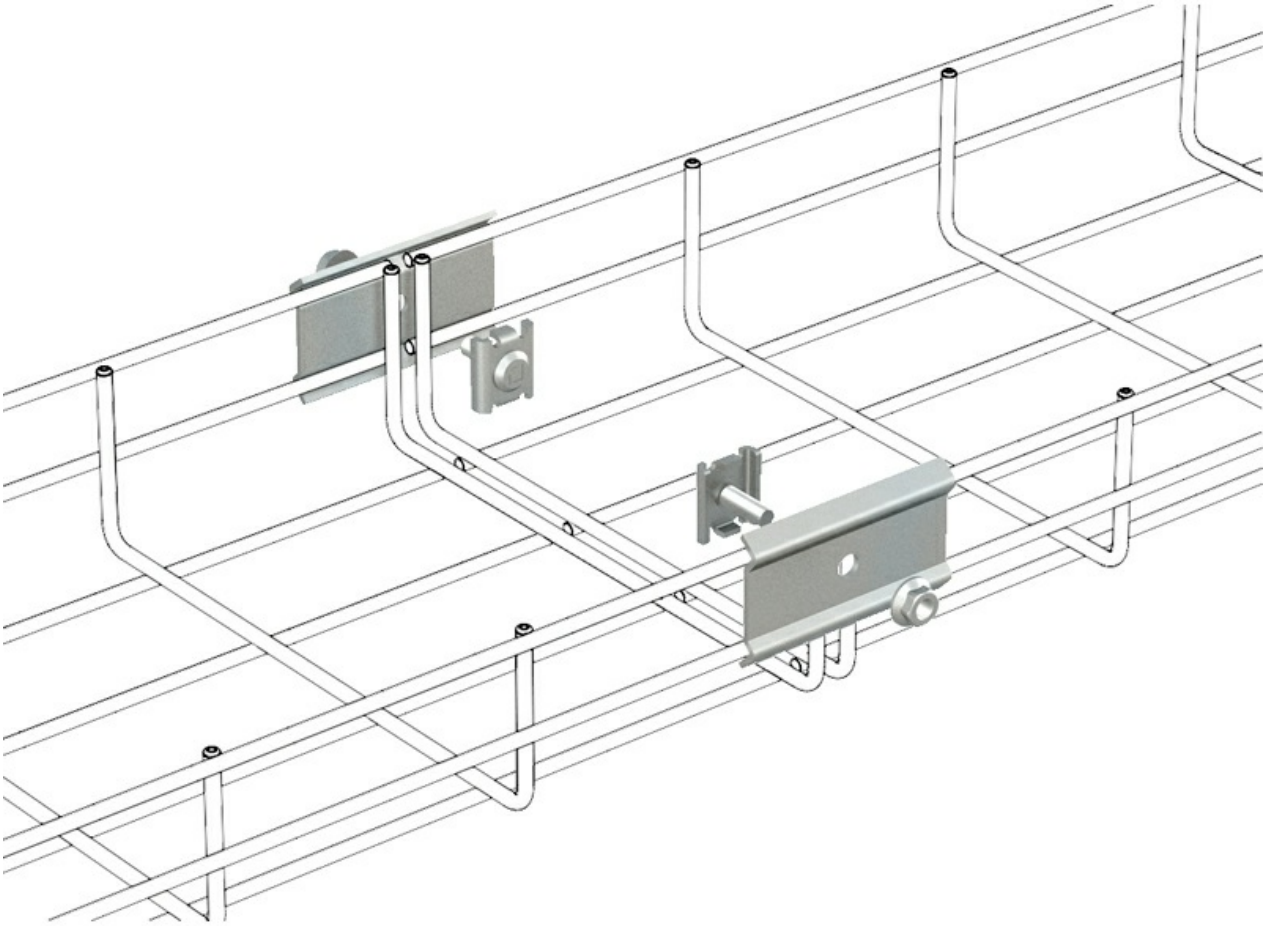

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."