


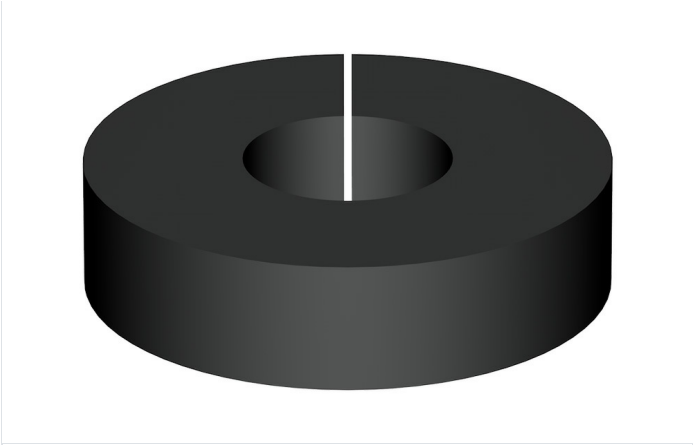

Description

Plug to make a fixation and a tightness of a cable with terminal, diameter, NW 5 mm, for internal thread gland Placement PG16.

Advantages

Applications

Solutions



## Product data

|                                              |                |                                       |                                              |
|----------------------------------------------|----------------|---------------------------------------|----------------------------------------------|
| <b>ETIM 10</b>                               | EC002318       | <b>u</b>                              | 25                                           |
| <b>Huella de CO2. GWP A1-A3 (kg CO2 eq.)</b> |                | <b>Material</b>                       | NBR                                          |
| <b>Colour</b>                                | Black RAL 9005 | <b>IP</b>                             | IP65                                         |
| <b>DN</b>                                    | NW 5           | <b>Working temperature range (°C)</b> | -40 / 100 °C                                 |
| <b>M/PG</b>                                  | PG16           | <b>Fire resistance</b>                | LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA |
| <b>Ø d2 (mm)</b>                             | 18             |                                       |                                              |
| <b>Holes</b>                                 | 1              |                                       |                                              |
| <b>kg/u</b>                                  | 0,002          |                                       |                                              |

## Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

